FREYN PV1 60X60
Housing: sheet steel
Protection glass: microprismatic diffuser PMMA
IP: 40
Driver: built-in
Dimmable: dali available
Colour: white
Colour temperature: -x830 3000K / -x840 4000K
CRI: >80
Lifetime: 50.000h L80 B10
Warranty: 5 years

FRYD22830	22W / 3000K / 3000lm / white	
FRYD31830	31W / 3000K / 4100lm / white	



FREYN PV4 30X120
Housing: sheet steel
Protection glass: microprismatic diffuser PMMA
IP: 40
Driver: built-in
Dimmable: dali available
Colour: white
Colour temperature: -x830 3000K / -x840 4000K
CRI: >80
Lifetime: 50.000h L80 B10
Warranty: 5 years

FRYD22830PV4	22W / 3000K / 3000lm / white	
FRYD31830PV4	31W / 3000K / 4100lm / white	



GENERAL LIGHTING

RECESSED

GACRUX ECO RECESSED 60X60
Housing: sheet steel
Protection glass: microprismatic diffuser PMMA
IP: 40
Driver: built-in
Dimmable: dali available
Colour: white
Colour temperature: 3000K or 4000K
CRI: >80
Lifetime: 50.000h L80 B10
Warranty: 5 years

ECOGA3O	42W / 3000K / 3950lm / opal	
ECOGA4O	42W / 4000K / 4150lm / opal	



GACRUX ECO RECESSED 30X120
Housing: sheet steel
Protection glass: microprismatic diffuser PMMA
IP: 40
Driver: built-in
Dimmable: dali available
Colour: white
Colour temperature: 3000K or 4000K
CRI: >80
Lifetime: 50.000h L80 B10
Warranty: 5 years

ECOGA3OPV4	39W / 3000K / 4050lm / opal	
ECOGA4OPV4	39W / 4000K / 4250lm / opal	
ECOGA3PPV4	39W / 3000K / 3500lm / prisma	

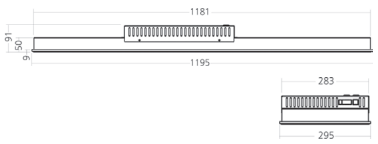





DECLAN
Housing: sheet steel
Reflector: polished metallised polycarbonate
Version for plasterboard ceiling on request
IP: 20
Driver: included
Dimmable: dali available
Colour: white
Colour temperature: 3000K or 4000K
CRI: >80
UGR: <19
Beam angle: 74°
Lifetime: 50.000h L80 B10
Warranty: 5 years

DEC33830PV1	33W / 74° / 3000K / 3700lm / white / 60x60	
DEC33840PV1	33W / 74° / 4000K / 3800lm / white / 60x60	
DEC33830PV4	33W / 74° / 3000K / 3700lm / white / 30x120	
DEC33840PV4	33W / 74° / 4000K / 3800lm / white / 30x120	



BASIC LED ROUND RT600
Housing: sheet steel, white powder coated finish
Protection glass: opal
IP: 40
Driver: included
Dimmable: dali available
Colour: white
Colour temperature: 3000K, 4000K, 5000K, RGB
CRI: >80
UGR: <19
Lifetime: 50.000h L70 B30
Warranty: 5 years

BLEDR32830	32W / 3070lm / 3000K / x = 400	
BLEDR33830	33W / 2850lm / 3000K / x = 530	
BLEDR40830	40W / 3374lm / 3000K / x = 530	
BLEDR48830	48W / 3944lm / 3000K / x = 530	



GENERAL LIGHTING

RECESSED

SPARTAN RT600
Housing: sheet steel, white powder coated finish
Protection glass: opal
IP: 40
Driver: included
Dimmable: dali available
Colour: white
Colour temperature: 3000K or 4000K
CRI: >80
UGR: <19
Lifetime: 50.000h L70 B30
Warranty: 5 years

SPART60021830	21W / 1980lm / 3000K	
SPART60033830	33W / 3350lm / 3000K	

SPARTAN L RT600
Housing: sheet steel, white powder coated finish
Optic: mat anodized aluminium
IP: 40
Driver: included
Dimmable: dali available
Colour: white
Colour temperature: 3000K or 4000K
CRI: >80
UGR: <19
Lifetime: 50.000h L70 B30
Warranty: 5 years

SPALRT60021830	21W / 2600lm / 3000K	
SPALRT60033830	33W / 4400lm / 3000K	



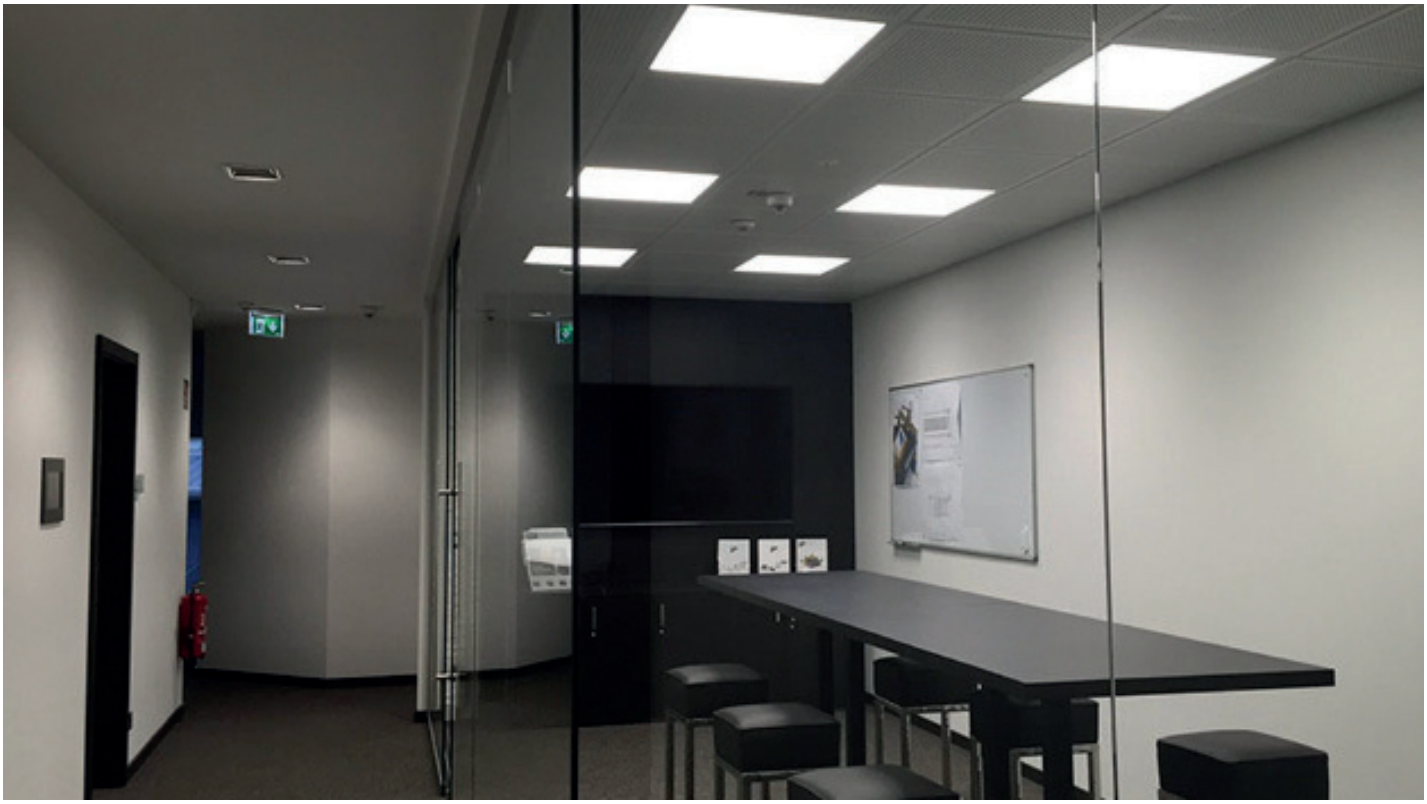

VISIBLE PLASTER CEILING FRAME FOR LUMINAIRE
Aluminium profile
Fast and easy luminaire installation
Visible frame after mounting

FRAME6060LUG	600 x 600 mm	





AILIN Line
Housing: extruded aluminium
Protection glass: opal PMMA
IP: 40
Driver: included
Dimmable: dali available
Colour: white
Colour temperature: 3000K or 4000K
CRI: >80
Beam angle: 90°
Lifetime: 50.000h L80 B10
Warranty: 3 years

ALNLINEMF37830	37W / 90° / 3000K / 2950lm	
ALNLINEMT37830	37W / 90° / 3000K / 2950lm	
ALNLINEML37830	37W / 90° / 3000K / 2950lm	
ALNLINELF47830	47W / 90° / 3000K / 3650lm	
ALNLINELT47830	47W / 90° / 3000K / 3650lm	
ALNLINELL47830	47W / 90° / 3000K / 3650lm	

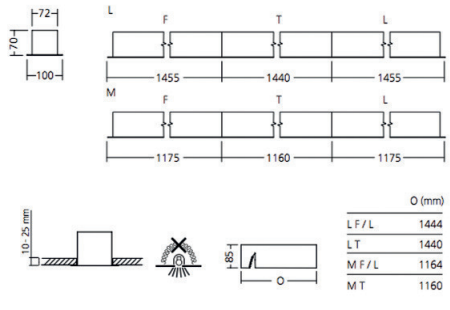



AILIN
Housing: extruded aluminium
Protection glass: opal PMMA
IP: 40
Driver: included
Dimmable: dali available
Colour: white
Colour temperature: 3000K or 4000K
CRI: >80
Beam angle: 90°
Lifetime: 50.000h L80 B10
Warranty: 3 years

ALNM37830	37W / 90° / 3000K / 2950lm	
ALNL47830	47W / 90° / 3000K / 3650lm	



INFINITY FRAME MICRO-PRISMATIC
Housing: extruded aluminium
Protection glass: opal diffuser
IP: 20
Driver: built-in
Dimmable: dali on request
Colour: -0xx white / -1xx black / -2xx grey
Colour temperature: 3000K or 4000K
CRI: >80
Lifetime: 50.000h L80 B20
Warranty: 5 years

16212-0CL	12,5W / 3000K / 1660lm / 580mm / white	
16212-0CH	23W / 3000K / 3050lm / 580mm / white	
16213-0CL	18,5W / 3000K / 2490lm / 860mm / white	
16213-0CH	34W / 3000K / 4575lm / 860mm / white	
16214-0CL	25W / 3000K / 3320lm / 1140mm / white	
16214-0CH	45,5W / 3000K / 6100lm / 1140mm / white	
16215-0CL	31W / 3000K / 4150lm / 1420mm / white	
16215-0CH	57W / 3000K / 7625lm / 1420mm / white	
16217-0CL	43,5W / 3000K / 5810lm / 1980mm / white	
16217-0CH	80W / 3000K / 10675lm / 1980mm / white	

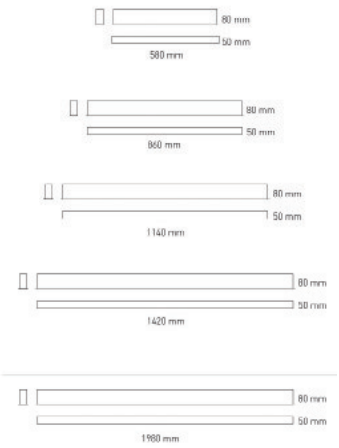

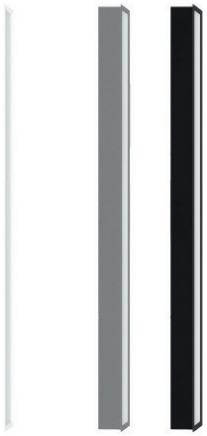

INFINITY FRAME OPAL
Housing: extruded aluminium
Protection glass: opal diffuser
IP: 20
Driver: built-in
Dimmable: dali on request
Colour: -0xx white / -1xx black / -2xx grey
Colour temperature: -xCxx 3000K / -xNxx 4000K
CRI: >80
Lifetime: 50.000h L80 B20
Warranty: 5 years

16202-0CL	12,5W / 3000K / 1660lm / 580mm / white	
16202-0CH	23W / 3000K / 3050lm / 580mm / white	
16203-0CL	18,5W / 3000K / 2490lm / 860mm / white	
16203-0CH	34W / 3000K / 4575lm / 860mm / white	
16204-0CL	25W / 3000K / 3320lm / 1140mm / white	
16204-0CH	45,5W / 3000K / 6100lm / 1140mm / white	
16205-0CL	31W / 3000K / 4150lm / 1420mm / white	
16205-0CH	57W / 3000K / 7625lm / 1420mm / white	
16207-0CL	43,5W / 3000K / 5810lm / 1980mm / white	
16207-0CH	80W / 3000K / 10675lm / 1980mm / white	

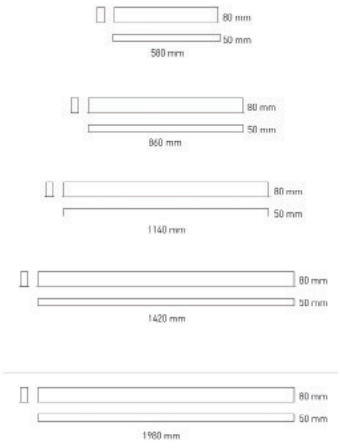

RELAX H LED
Housing: sheet steel
Optic: mat, anodized aluminium, parabolic
IP: 20
Driver: included
Dimmable: dali available
Colour: white
Colour temperature: 3000K or 4000K
CRI: >80
Beam angle: 70° or 88°
Lifetime: 50.000h L80 B10
Warranty: 5 years

RELHM21830	21W / 3000K / 2200lm / white / 1200mm medium	
RELHM49830	49W / 3000K / 5500lm / white / 1200mm medium	
RELHL42830	42W / 3000K / 4850lm / white / 1500mm large	
RELHL56830	56W / 3000K / 6400lm / white / 1500mm large	



BASIC LED L
Housing: sheet steel, white powder coated finish
Optic: mat, anodized aluminium, parabolic
IP: 40
Driver: included
Dimmable: dali, DSI or DIM1-10V available
Colour: white
Colour temperature: 3000K, 4000K or 6500K
CRI: >80
Warranty: 5 years

BASLEDL36830	36W / 3000K / 3200lm / MIRO4 + DIF / 1195mm (A) / 106 (H)	
BASLEDL28830	28W / 3000K / 2500lm / MIRO4 + DIF / 1495mm (A) / 106 (H)	
BASLEDL72830	72W / 3000K / 6400lm / MIRO4 + DIF / 1195mm (A) / 300 (H)	
BASLEDL56830	56W / 3000K / 5000lm / MIRO4 + DIF / 1495mm (A) / 300 (H)	



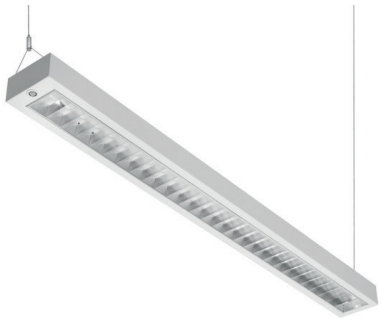

BOXYLED DIR SURFACED
Housing: sheet steel, white powder coated finish
Optic: PML mat, anodised aluminium
Optic: PSL polished, anodized aluminium
IP: 20
Dimmable: dali available
Colour temperature: 3000K, 4000K, 6500K
CRI: >80
Lifetime: 50.000h L70 B30
Warranty: 5 years

BOLDIR2212840PM	22W / 4000K / 2350lm / PML / white	
BOLDIR2212840PS	22W / 4000K / 2350lm / PSL / white	
BOLDIR4012840PM	40W / 4000K / 4275lm / PML / white	
BOLDIR4012840PS	40W / 4000K / 4275lm / PSL / white	
BOLDIR2615840PM	26W / 4000K / 2750lm / PML / white	
BOLDIR2615840PS	26W / 4000K / 2750lm / PSL / white	
BOLDIR5015840PM	50W / 4000K / 5300lm / PML / white	
BOLDIR5015840PS	50W / 4000K / 5300lm / PSL / white	
BOLEDSUS	Suspension kit boxyled	

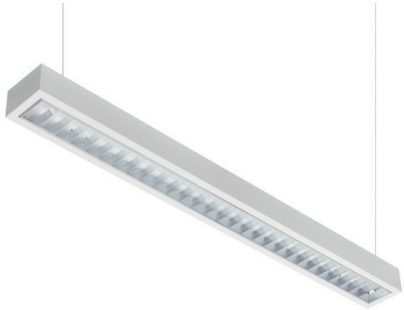

BOXYLED DIR/INDIR
Housing: sheet steel, white powder coated finish
Optic: PML mat, anodised aluminium
Optic: PSL polished, anodized aluminium IP: 20
Dimmable: dali available
Colour temperature: 3000K, 4000K, 6500K
CRI: >80
Lifetime: 50.000h L70 B30
Warranty: 5 years

BOLDI5512840PM	55W / 4000K / 5745lm / PML / white	
BOLDI5512840PS	55W / 4000K / 5745lm / PSL / white	
BOLDI6312840PM	63W / 4000K / 6310lm / PML / white	
BOLDI6312840PS	63W / 4000K / 6310lm / PSL / white	
BOLDI8015840PM	80W / 4000K / 8200lm / PML / white	
BOLDI8015840PS	80W / 4000K / 8200lm / PSL / white	



A: 603 (10W) B=120
1203 (20W, 36W)
1483 (23W, 45W)

GENERAL LIGHTING

SURFACE MOUNTED AND SUSPENDED

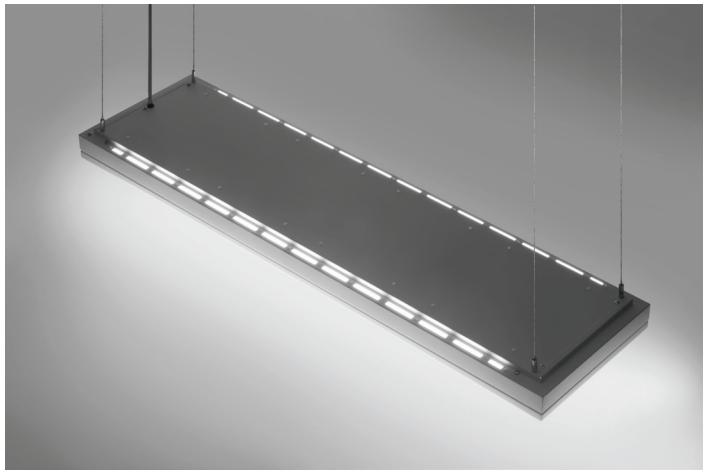

SKY DIRECT-INDIRECT / SURFACE MOUNTED
Housing: sheet steel, powder coated
IP: 40
Colour: white, black, grey
Colour temperature: 3000K
CRI: >90
Lifetime: 50.000 L70 B30
Warranty: 5 years

SKYR3650930W	36W / 3000K / 3650lm / L1110 / white	
SKYR4330930W	43W / 3000K / 4330lm / L1110 / white	
SKYR5050930W	51W / 3000K / 5050lm / L1110 / white	
SKYR4560930W	43W / 3000K / 4560lm / L1360 / white	
SKYR5400930W	53W / 3000K / 5400lm / L1360 / white	
SKYR6310930W	63W / 3000K / 6310lm / L1360 / white	

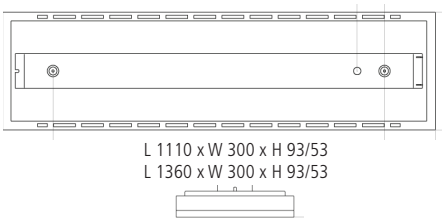

L 1110 x W 300 x H 93/53
L 1360 x W 300 x H 93/53



SKY DIRECT-INDIRECT / SUSPENDED
Housing: sheet steel, powder coated
IP: 40
Colour: white, black, grey
Colour temperature: 3000K
CRI: >90
Lifetime: 50.000 L70 B30
Warranty: 5 years

SKYS3650930W	36W / 3000K / 3650lm / L1110 / white	
SKYS4330930W	43W / 3000K / 4330lm / L1110 / white	
SKYS5050930W	51W / 3000K / 5050lm / L1110 / white	
SKYS4560930W	43W / 3000K / 4560lm / L1360 / white	
SKYS5400930W	53W / 3000K / 5400lm / L1360 / white	
SKYS6310930W	63W / 3000K / 6310lm / L1360 / white	

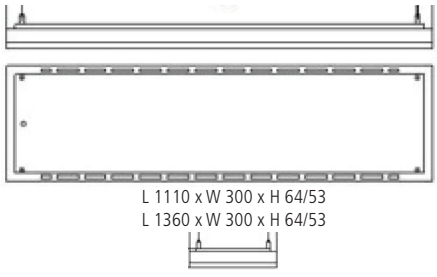

L 1110 x W 300 x H 64/53
L 1360 x W 300 x H 64/53

PLANK SUSPENDED DIRECT
Housing: metal body
Reflector: microprismatic PMMA diffuser
IP: 20
Colour: white, black, grey
Colour temperature: 3000K
CRI: >80
Lifetime: 50.000 L70 B30
Warranty: 5 years

PLAD3930830W	42W / 3000K / 4200lm / white	
PLAD3930830B	42W / 3000K / 4200lm / black	
PLAD3930830G	42W / 3000K / 4200lm / grey	

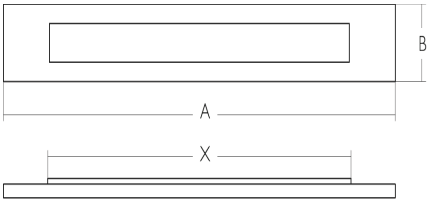

L 1490 x W 200 x H 36



PLANK SUSPENDED DIRECT / INDIRECT
Housing: metal body
Reflector: microprismatic PMMA diffuser
IP: 20
Colour: white, black, grey
Colour temperature: 3000K
CRI: >80
Lifetime: 50.000 L70 B30
Warranty: 5 years

PLADI5040830W	48W / 3000K / 5040lm / white	
PLADI5040830B	48W / 3000K / 5040lm / black	
PLADI5040830G	48W / 3000K / 5040lm / grey	

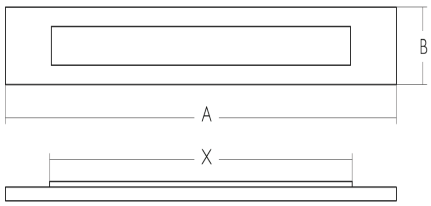

L 1490 x W 200 x H 36

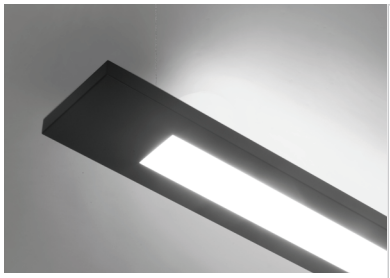

PLANK SUSPENDED DIRECT / INDIRECT - TUNABLE WHITE AND DIMMING
Housing: metal body
Reflector: microprismatic PMMA diffuser
IP: 20
Colour: white, black, grey
Colour temperature: 3000K
CRI: >80
Lifetime: 50.000 L70 B30
Warranty: 5 years

PLATWDI3930830W	52W / 3000-6000K / 4430lm / white	
PLATWDI3930830B	52W / 3000-6000K / 4430lm / black	
PLATWDI3930830G	52W / 3000-6000K / 4430lm / grey	

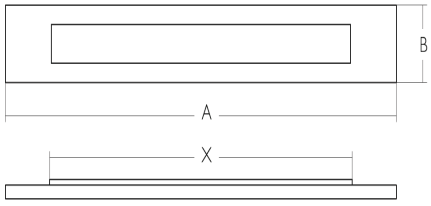

L 1490 x W 200 x H 36

GENERAL LIGHTING

SURFACE MOUNTED AND SUSPENDED

DUELIS
Housing: aluminium body
Reflector: diamond microprismatic PMMA diffuser
Colour: white, other colours on request
Colour temperature: 3000K or 4000K
CRI: >80
Suspension included
Lifetime: 50.000h L70 B30

DUE65830W	65W / 3000K / 5250lm	
DUE65840W	65W / 4000K / 5450lm	



LAMBDA
Housing: sheet steel
Optic: mat, anodized aluminium, parabolic
IP: 20
Colour: white, other colours on request
Colour temperature: 3000K, 4000K
Suspended version on request
CRI: >80
Lifetime: 50.000h L70 B30
Warranty: 5 years

LAM35830W	35W / 3000K / 3800lm	
LAM35840W	35W / 4000K / 3900lm	
LAM54830W	54W / 3000K / 5850lm	
LAM54840W	54W / 4000K / 6000lm	



SNAPPY CONTINUOUS LINE
Housing: natural anodized extruded aluminium
Reflector: opal polycarbonate diffuser
IP: 20
Dimmable: dali available
Colour: grey
Colour temperature: 3000K or 4000K
CRI: >80
Lifetime: 50.000h L80 B20
Warranty: 5 years

SNAPL29830	29W / 3000K / 2550lm	
SNAPL29840	29W / 4000K / 2400lm	
SNAPL58830	58W / 3000K / 5150lm	

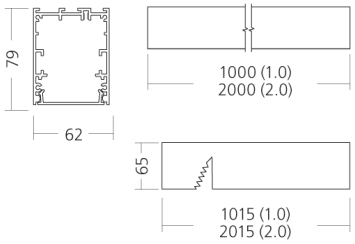

SNAPPY CORNER 90°
Housing: natural anodized extruded aluminium
Reflector: opal polycarbonate diffuser
IP: 20
Dimmable: dali available
Colour: grey
Colour temperature: 3000K or 4000K
CRI: >80
Lifetime: 50.000h L80 B20
Warranty: 5 years

SNAPC23830	23W / 3000K / 1950lm	
SNAPC23840	23W / 4000K / 2000lm	



SNAPPY END CAP / CONNECTION
Recessed / surface mounted / suspended
Natural anodized extruded aluminium

SNAPENDTR	End cap trimless	
SNAPENDSU	End cap suspension / surface mounted	
SNAPCON	Connection pieces set	

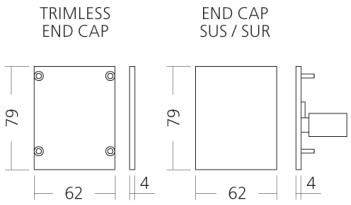

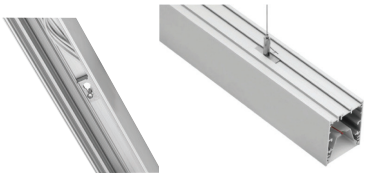

SNAPPY BRACKETS FOR SURFACE MOUNTING AND SUSPENSION

SNAPMB	Mounting bracket	
PCO/052	Bracket with suspension	
PCO/051	Bracket with suspension + plastic cover	



SNAPPY BRACKETS FOR RECESSED MOUNTING

SNAPTRIMB	Trimless mounting bracket	

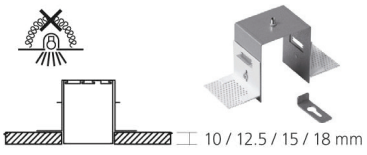

GENERAL LIGHTING

SURFACE MOUNTED AND SUSPENDED

FREYN SURFACED
Housing: sheet steel
Protection glass: microprismatic diffuser PMMA
IP: 20
Driver: built-in
Dimmable: dali available
Colour: white
Colour temperature: 3000K or 4000K
CRI: >80
Beam angle: 85° or 89°
Lifetime: 50.000h L80 B10
Warranty: 5 years

FRYSUR22830	22W / 3000lm / 3000K / white	
FRYSUR31830	31W / 4100lm / 3000K / white	



GACRUX ECO SURFACED
Housing: aluminium
Protection glass: microprismatic diffuser PMMA (opal or prisma)
IP: 40
Driver: built-in
Dimmable: dali on request
Colour: white
Colour temperature: 3000K or 4000K
CRI: >80
Beam angle: 94° or 107°
Lifetime: 50.000h L80 B10
Warranty: 5 years

ECOGASUR3O	43W / 3000K / 3950lm / opal	
ECOGASUR3P	43W / 3000K / 3950lm / prisma	
PCO/003	Suspension set	

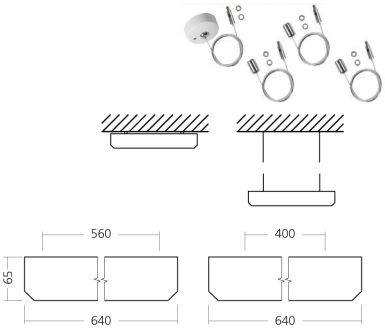

GACRUX ECO PV4 SURFACED
Housing: aluminium
Protection glass: microprismatic diffuser PMMA (opal or prisma)
IP: 40
Driver: built-in
Dimmable: dali on request
Colour: white
Colour temperature: 3000K or 4000K
CRI: >80
Beam angle: 94° or 107°
Lifetime: 50.000h L80 B10
Warranty: 5 years

ECOGASUR3OPV4	43W / 3000K / 3950lm / opal	
PCO/003	Suspension set	

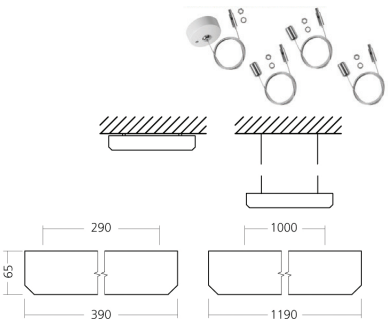





DECLAN SURFACED
Housing: sheet steel
Reflector: polished metallised polycarbonate
IP: 20
Driver: included
Dimmable: dali available
Colour: white
Colour temperature: 3000K or 4000K
CRI: >80
UGR: <19
Beam angle: 74°
Lifetime: 50.000h L80 B10
Warranty: 5 years

DECSUR33830PV1	33W / 74° / 3000K / 3700lm	
DECSUR33830PV4	33W / 74° / 3000K / 3700lm	

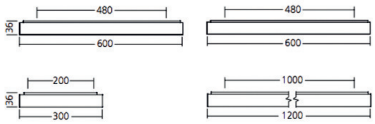

SPARTAN SURFACED
Housing: sheet steel, white powder coated finish
Protection glass: opal
IP: 40
Driver: included
Dimmable: dali available
Colour: white
Colour temperature: 3000K or 4000K
CRI: >80
UGR: <19
Lifetime: 50.000h L70 B30
Warranty: 5 years

SPARSUR21830	21W / 3000K / 1980lm	
SPARSUR33830	33W / 3000K / 3950lm	



GENERAL LIGHTING SURFACE MOUNTED AND SUSPENDED



ACELIN D/I
Housing: extruded aluminium
Reflector: opal diffuser PMMA
IP: 40
Driver: included
Dimmable: dali available
Colour: aluminium
Colour temperature: 3000K or 4000K
CRI: >80
Beam angle: 90°
Lifetime: 50.000h L80 B10
Warranty: 5 years

ACELMDI59830	59W / 90° / 3000K / 5500lm	
ACELLDI74830	74W / 90° / 3000K / 6900lm	



ACELIN D/I Line
Housing: extruded aluminium
Reflector: opal diffuser PMMA
IP: 40
Driver: included
Dimmable: dali available
Colour: aluminium
Colour temperature: 3000K or 4000K
CRI: >80
Beam angle: 90°
Lifetime: 50.000h L80 B10
Warranty: 5 years

ACELMFDI59830	59W / 90° / 3000K / 5500lm	
ACELMTDI59830	59W / 90° / 3000K / 5500lm	
ACELMLDI59830	59W / 90° / 3000K / 5500lm	
ACELLFDI74830	74W / 90° / 3000K / 6900lm	
ACELLTDI74830	74W / 90° / 3000K / 6900lm	
ACELLLDI74830	74W / 90° / 3000K / 6900lm	



INFINITY DIRECT
Housing; extruded aluminium
Protection glass: opal diffuser
IP: 20
Driver: included
Dimmable: dali available
Colour: -0xx white / -1xx black / -2xx grey
Colour temperature: -xCx 830 / -xNx 840
CRI: >80
Lifetime: 50.000h L80 B20
Warranty: 5 years

16102-1CL	12,5W / 3000K / 1660lm / 573mm / black	
16102-1CH	23W / 3000K / 3050lm / 573mm / black	
16103-1CL	18,5W / 3000K / 2490lm / 853mm / black	
16103-1CH	34 W / 3000K / 4575lm / 853mm / black	
16104-1CL	25W / 3000K / 3320lm / 1133mm / black	
16104-1CH	45,5W / 3000K / 6100lm / 1133mm / black	
16105-1CL	31W / 3000K / 4150lm / 1413mm / black	
16105-1CH	57W / 3000K / 7625lm / 1413mm / black	
16107-1CL	43,5W / 3000K / 5810lm / 1973mm / black	
16107-1CH	80W / 3000K / 10675lm / 1973mm / black	

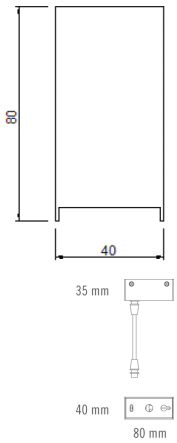

INFINITY ACCESSORIES

17936	Steel wire suspension unit 2500mm	
17942-1	Black base + supply cable / 1500mm / 5 wires	
17943-1	Black base + supply cable / 2500mm / 3 wires	
17944-1	Black base + supply cable / 2500mm / 5 wires	

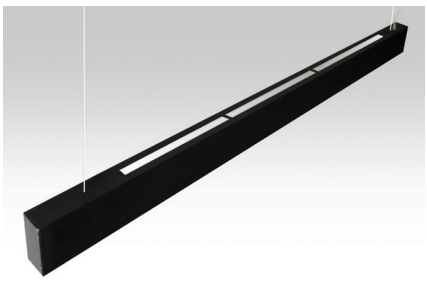

INFINITY SUSPENDED DIRECT-INDIRECT
Housing; extruded aluminium
Protection glass: opal diffuser
IP: 20
Driver: included
Suspension 1500mm included, 2500mm on request
Dimmable: dali available
Colour: -0xx white / -1xx black / -2xx grey
Colour temperature: -xCx 830 / -xNx 840
CRI: >80
Lifetime: 50.000h L80 B20
Warranty: 5 years

16303-1CL	31W / 3000K / 4150lm / 853mm / black	
16304-1CL	43,5W / 3000K / 5810lm / 1133mm / black	
16305-1CL	49,6W / 3000K / 6640lm / 1413mm / black	
16307-1CL	74,4W / 3000K / 9960lm / 1973mm / black