




Product data sheet



MYAR SURFACED

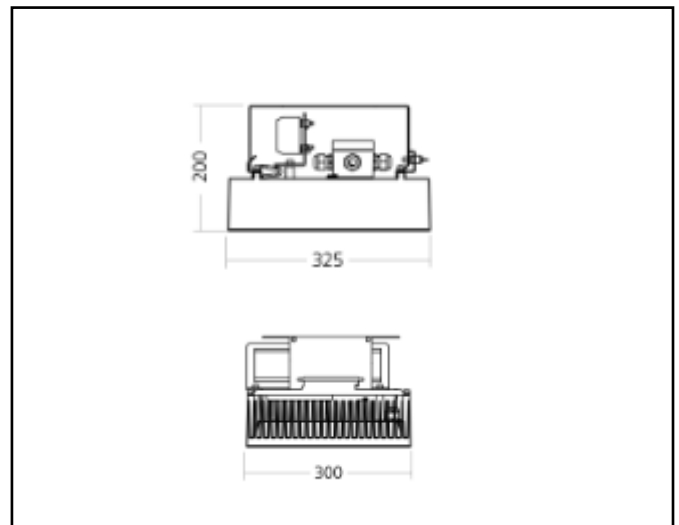

| | |
|--------------------------------|--|
| Description | Surface mounted fixture |
| Dimensions (mm) | 325 x 300mm x 200mm |
| Weight (kg) | 9,600 kg |
| Housing | Housing: die cast alu + sheet steel |
| Colour | Black (Ral9005) |
| Optical system | PMMA + glass |
| Lighting Distribution | Direct 84° - symmetrical |
| Unified Glare Ratio | <19 |
| Colour temperature (K) | 4000 K |
| CRI (Ra) | 80 |
| SCDM | 3 |
| Net lumen output (25°C) | 12.000 lm |
| Efficacy – LOR (lm/W) | 133 lm/W |
| Power (driver incl.) | 90W |
| Driver | Driver incorporated Non dim, DALI, DSI or 1-10V DIM |
| IP | IP 65 |
| IK | IK 07 |
| Lifetime (hours) | 50.000 hours L80 B10 |
| Warranty | 5 years |
| Origin | Slowakja |
| Norms | LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC |

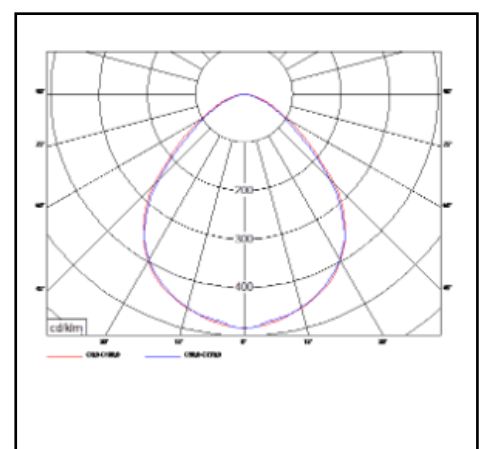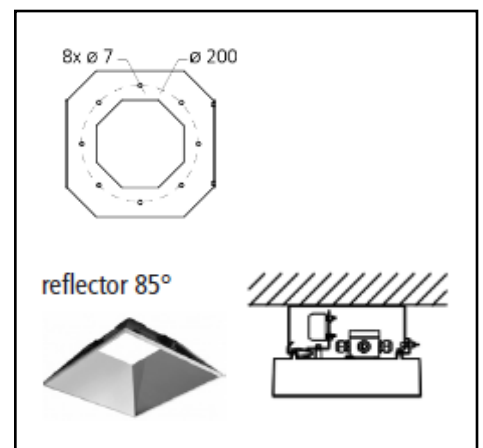

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620
Zottegem

info@euro-luce.be
www.euro-luce.be

Tel 0032 54 55 71 10

Marks

