




Product data sheet



PLAO LB

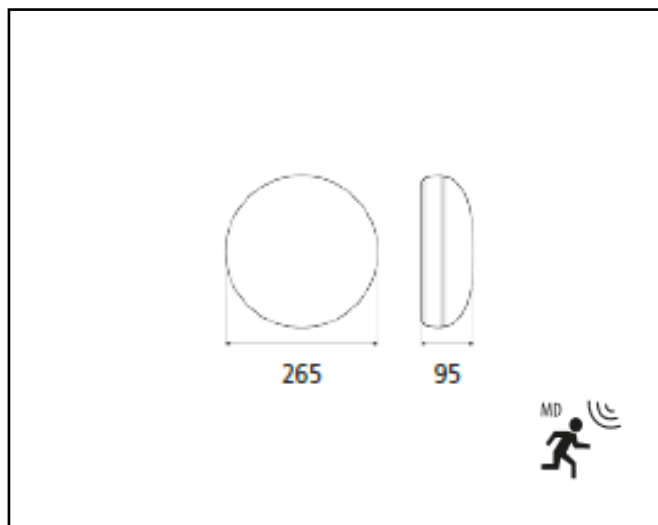

Description	Surface mounted fixture with integrated radar motion detector
Dimensions (mm)	265mm x 95mm
Weight (kg)	0,700 kg
Housing	Body ABS Plastic Diffuser Polycarbonate
Colour	White
Optical system	Opal polycarbonate cover
Lighting Distribution	Rotationally-symmetric
Unified Glare Ratio	
Colour temperature (K)	3000 K
CRI (Ra)	80
SCDM	3
Net lumen output (25°C)	1000 lm
Efficacy – LOR (lm/W)	80 lm/W
Power (driver incl.)	13 W
Driver	Driver incorporated, not dimmable
IP	IP 54
IK	IK 10
Lifetime (hours)	30.000 hours L90 B10
Warranty	3 years
Origin	Poland
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

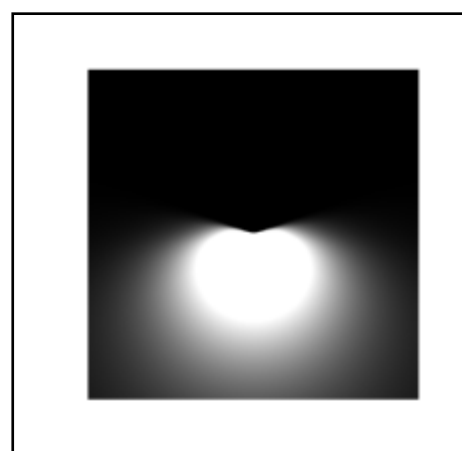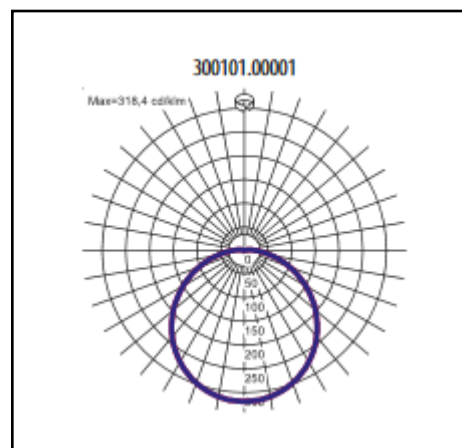

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620
Zottegem

info@euro-luce.be
www.euro-luce.be

Tel 0032 54 55 71 10

Marks

