

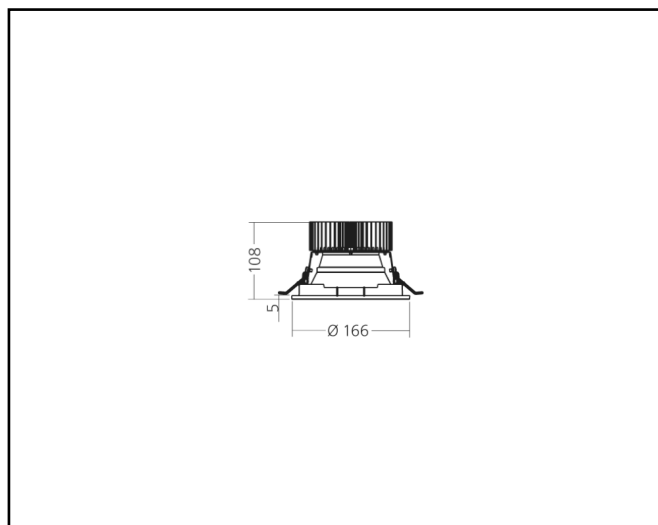


Product data sheet

Prettus S Asymmetric



Description	Outdoor, under canopy
Dimensions (mm)	166mm x 108mm
Weight (kg)	0,800kg
Housing	Sheet steel
Colour	White
Optical system	Asymmetric polished reflector + transparant cover Asymmetric matt reflector + transparant cover
Lighting Distribution	Asymmetric
Unified Glare Ratio	.
Colour temperature (K)	3000K
CRI (Ra)	80
SCDM	3
Net lumen output (25°C)	1050 - 1500lm
Efficacy – LOR (lm/W)	70 – 79
Power (driver incl.)	15 – 19W
Driver	.
IP	54
IK	.
Lifetime (hours)	50000h L80 B10
Warranty	5 years
Origin	Slovakia
Norms	.



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620
Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks