




Product data sheet



Vidar LED

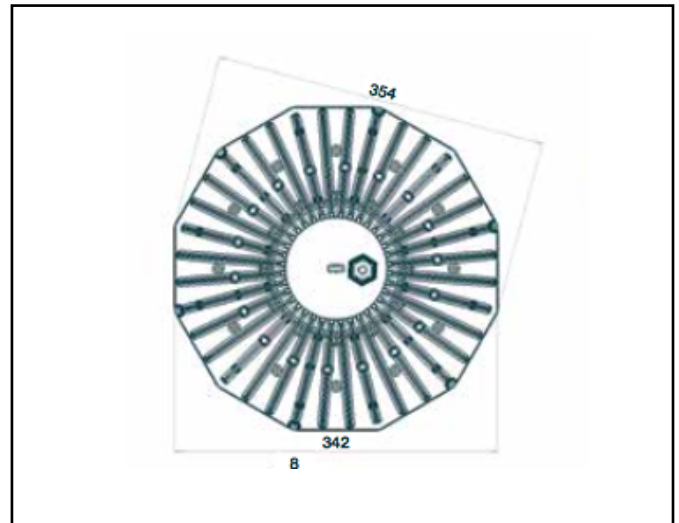

Description	Suspended luminaire
Dimensions (mm)	260mm x 194mm
Weight (kg)	4 kg
Housing	Diecast Aluminium
Colour	Black-grey RAL7021
Optical system	PMMA or PC
Lighting Distribution	NB 35°, MB 75°, WB 120°
Unified Glare Ratio	NB 19, MB21, WB29
Colour temperature (K)	4000 K
CRI (Ra)	> 80
SCDM	3
Net lumen output (25°C)	10500 - 20000 lm
Efficacy – LOR (lm/W)	120 – 125 lm/W
Power (driver incl.)	88 – 160W
Driver	Standard Digital, DALI Digital
IP	IP 65
IK	IK 06
Lifetime (hours)	50.000 hours L80 B10
Warranty	5 years
Origin	Germany
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ENEC pending Glow Wire Test PC850°C PMMA 650°C
Marks	CE $\frac{1}{2}$

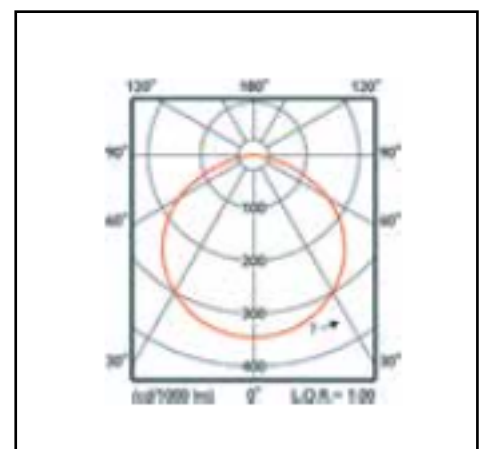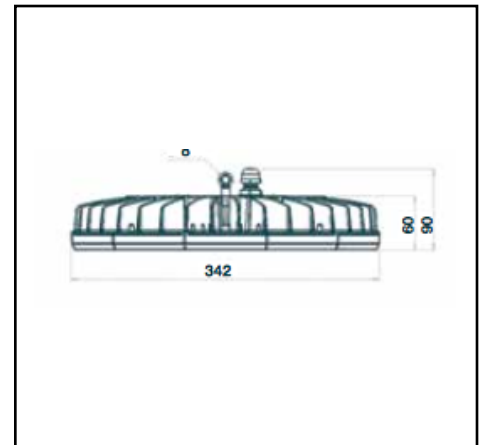

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620
Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10