




# Product data sheet



## BALDUR LED-MODULE

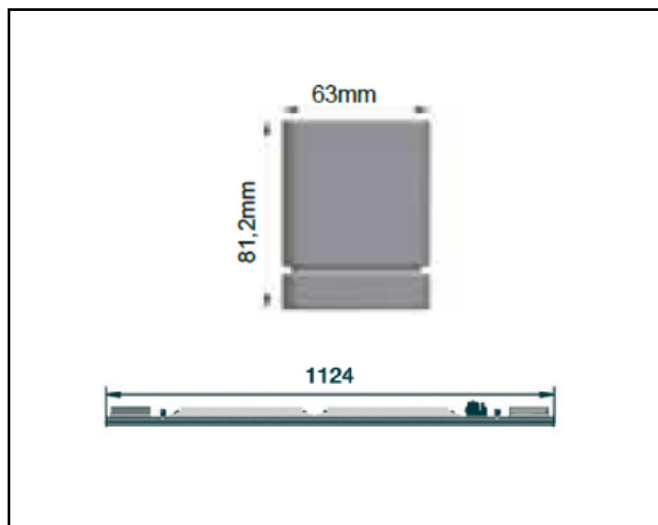

<b>Description</b>	Modular LED-module for Baldur Linesystem 4 of 6FT modulation
<b>Dimensions (mm)</b>	1124mm or 1686mm x 53mm x 12mm
<b>Weight (kg)</b>	1,200 kg tot 1,500kg
<b>Housing</b>	Steel sheet, painted
<b>Colour</b>	Black(B), white(W) or silver grey(G/SI)
<b>Optical system</b>	Clear lenses, polycarbonate
<b>Lighting Distribution</b>	UWB-WB(O)-MB(O)-NB(O),O, O-DI, AS, D- AS
<b>Unified Glare Ratio</b>	UGR 19-25
<b>Colour temperature (K)</b>	3000K-4000 K-6500K
<b>CRI (Ra)</b>	> 80
<b>SCDM</b>	3
<b>Net lumen output (25°C)</b>	3200 lm – 12000 lm
<b>Efficacy – LOR (lm/W)</b>	135-165 lm/W
<b>Power (driver incl.)</b>	22,5W – 75w
<b>Driver</b>	Driver incorporated, not dimmable DALI or 1-10v on request
<b>IP</b>	IP 40
<b>IK</b>	IK 07
<b>Lifetime (hours)</b>	70.000 hours L80 B10
<b>Warranty</b>	5 years
<b>Origin</b>	Nordeon, Germany
<b>Norms</b>	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008 ISO 14001:2009
<b>Marks</b>	CE

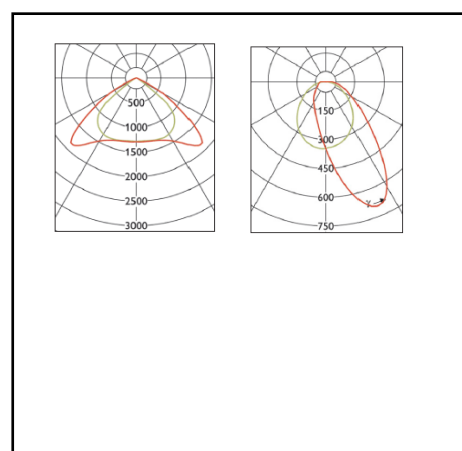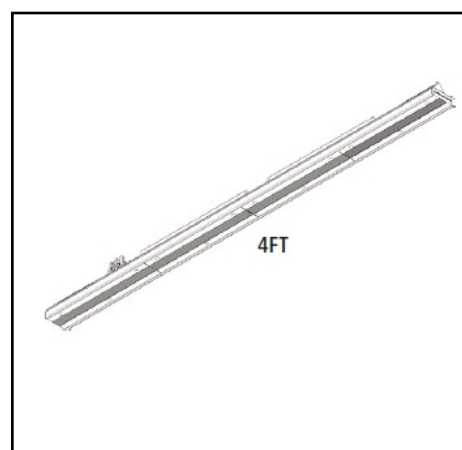

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering  
Ballingsweg 25 – 9620  
Zottegem  
[info@euro-luce.be](mailto:info@euro-luce.be)  
[www.euro-luce.be](http://www.euro-luce.be)  
Tel 0032 54 55 71 10