



# Product data sheet

COMIR

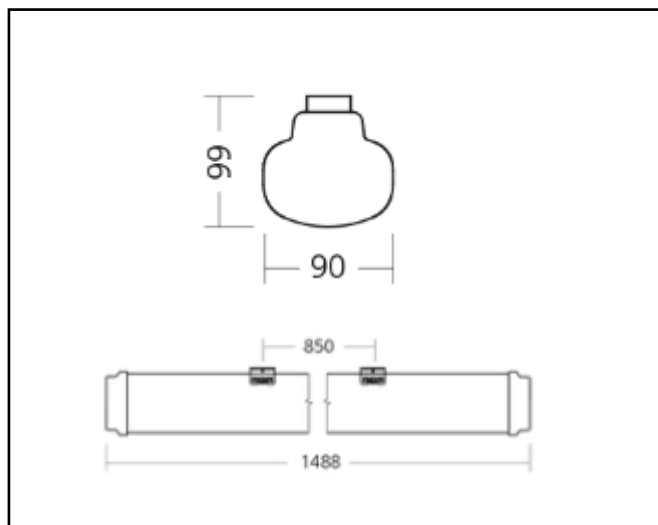

<b>Description</b>	Surface mounted fixture
<b>Dimensions (mm)</b>	1208 - 1488mm x 90mm x 99mm
<b>Weight (kg)</b>	2,600 - 3,300 kg
<b>Housing</b>	Polycarbonate body
<b>Colour</b>	White
<b>Optical system</b>	Opal polycarbonate diffuser
<b>Lighting Distribution</b>	Direct – rotationally-symmetrical
<b>Unified Glare Ratio</b>	<28
<b>Colour temperature (K)</b>	4000K
<b>CRI (Ra)</b>	80
<b>SCDM</b>	3
<b>Net lumen output (25°C)</b>	4200 - 6500lm
<b>Efficacy – LOR (lm/W)</b>	108 - 125lm/W
<b>Power (driver incl.)</b>	33 - 60W
<b>Driver</b>	Driver incorporated
<b>IP</b>	IP 65
<b>IK</b>	IK 08
<b>Lifetime (hours)</b>	50.000 hours L70 B50
<b>Warranty</b>	5 years
<b>Origin</b>	Slovakja
<b>Norms</b>	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

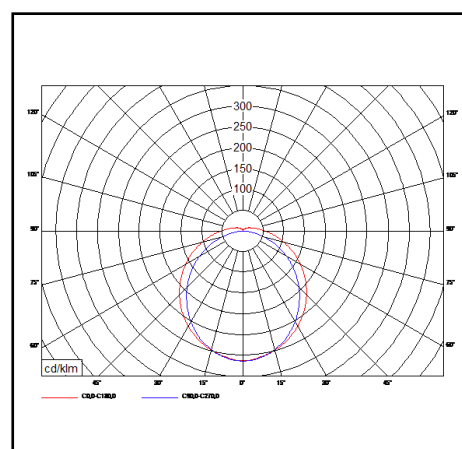

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering  
Ballingsweg 25 – 9620  
Zottegem

[info@euro-luce.be](mailto:info@euro-luce.be)  
[www.euro-luce.be](http://www.euro-luce.be)

Tel 0032 54 55 71 10

Marks

