



Product data sheet

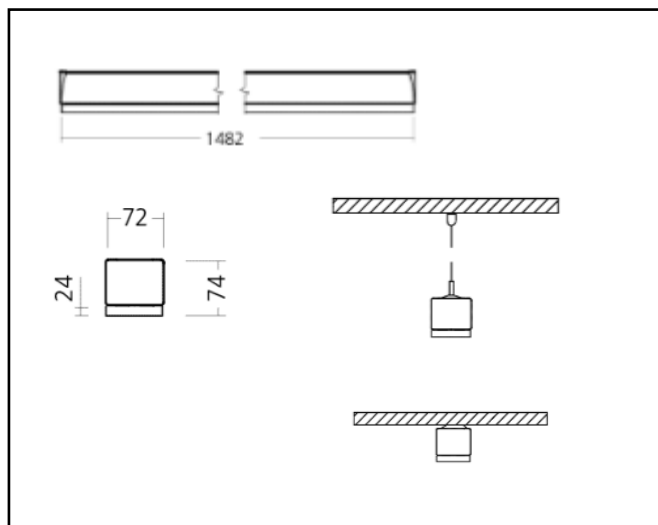

PRESTIGE LED

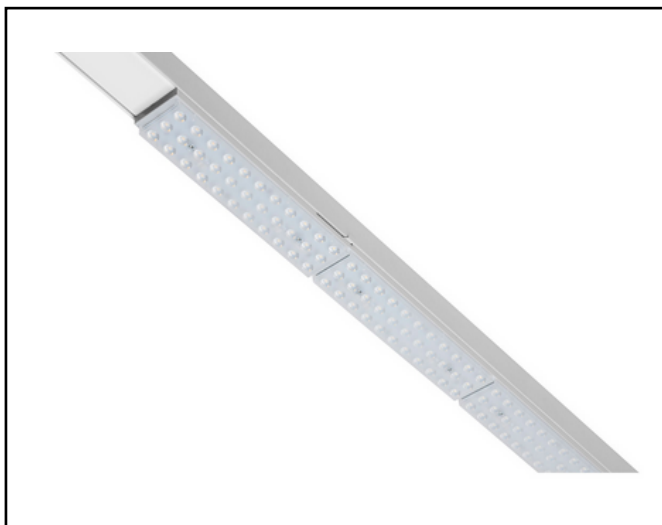

Description Modular LED-module for Prestige/Smart Linesystem

Dimensions (mm) 1482mm x 74mm x 72mm

Weight (kg) 2,800 kg

Housing Steel sheet, painted

Colour white

Optical system Clear lenses, polycarbonate

Lighting Distribution Double asymmetric

Unified Glare Ratio UGR 25/ 22

Colour temperature (K) 3000/ 4000 K

CRI (Ra) > 80

SCDM 3

Net lumen output (25°C) 6200/ 8400/ 8350 lm

Efficacy – LOR (lm/W) 147/ 145/ 144 lm/W

Power (driver incl.) 42/ 58 W

Driver Driver incorporated, not dimmable
DALI or 1-10v on request

IP IP 40

IK IK 07



Lifetime (hours) 50.000 hours L80 B10

Warranty 5 years

Origin Slowakija

Norms LVD 2006/95/EC
EMC 2004/108/EC
RoHS 2001/65/EC

Marks

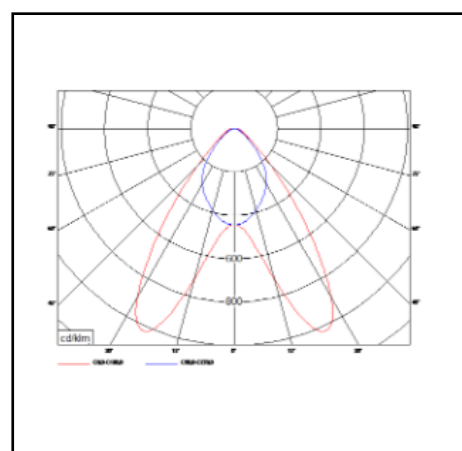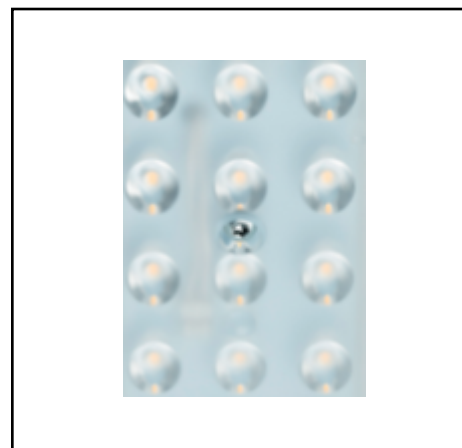

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620
Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10