

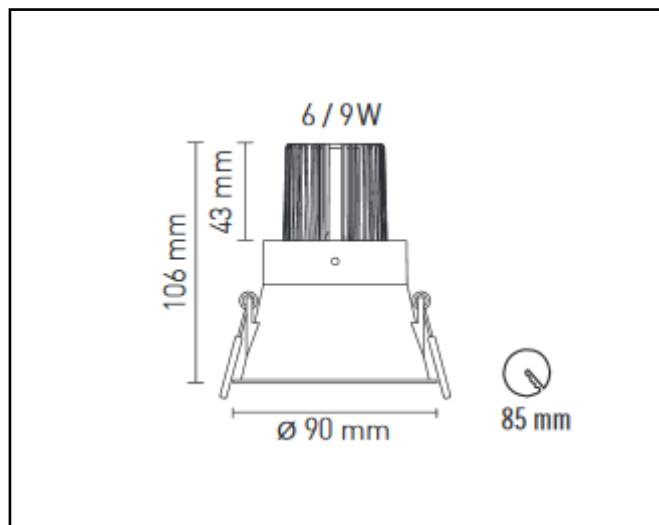


Product data sheet

TOLVA M

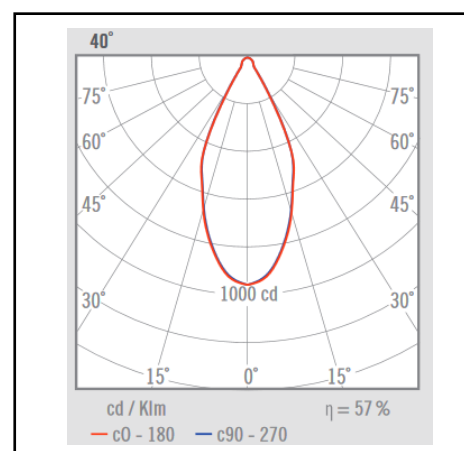

Description	Recessed, accent spot
Dimensions (mm)	90mm x 106/ 126mm
Weight (kg)	0,280 kg
Housing	Painted zamak
Colour	White, black, copper, gold, grafite, red
Optical system	facetted reflector
Lighting Distribution	40° rotational ssymmetric
Unified Glare Ratio	<22
Colour temperature (K)	2700 K
CRI (Ra)	> 90
SCDM	3
Net lumen output (25°C)	1030 - 1330 lm
Efficacy – LOR (lm/W)	103 - 114lm/W
Power (driver incl.)	9 - 13 W
Driver	Separate box included Dimmable edge-cut
IP	IP 20
IK	IK 02
Lifetime (hours)	40.000 hours L80 B20
Warranty	5 years
Origin	Spain
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

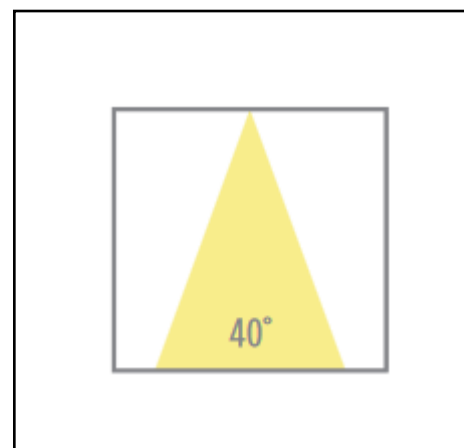

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620
Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10