Product data sheet

Alastar BSC

Semi-Recessed

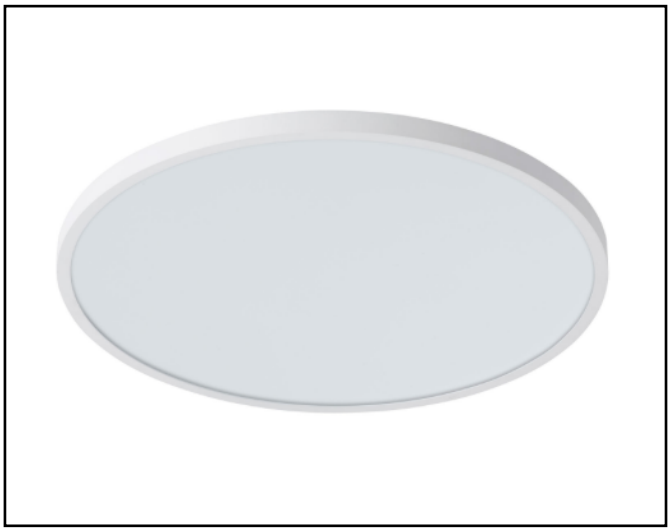



Description	Ceiling recessed luminaire
Dimensions (mm)	464 - 616mm x 111mm Opening: 460 – 610mm
Weight (kg)	4,1 – 9,2 kg
Housing	extruded aluminium
Colour	Grey
Optical system	Opal diffusor PMMA
Lighting Distribution	Direct - wide
Unified Glare Ratio	<25
Colour temperature (K)	3000 / 4000 K
CRI (Ra)	> 80
SCDM	3
Net lumen output (25°C)	2550 – 3950 lm
Efficacy – LOR (lm/W)	94 - 113 lm/W
Power (driver incl.)	27 – 35 W
Driver	Incorporated – non dimmable DALI or 1-10v on request
IP	IP 40
IK	IK 02
Lifetime (hours)	50.000 hours L80 B10
Warranty	5 years
Origin	Slowakja
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC
Marks	CE

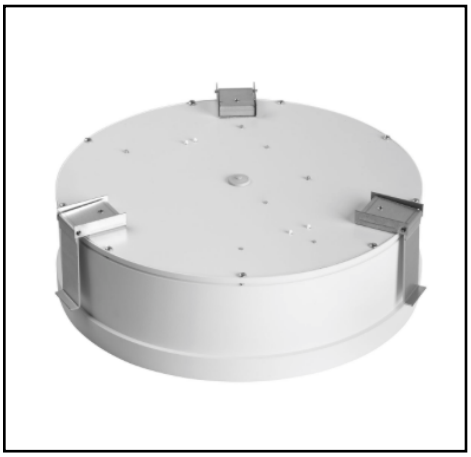

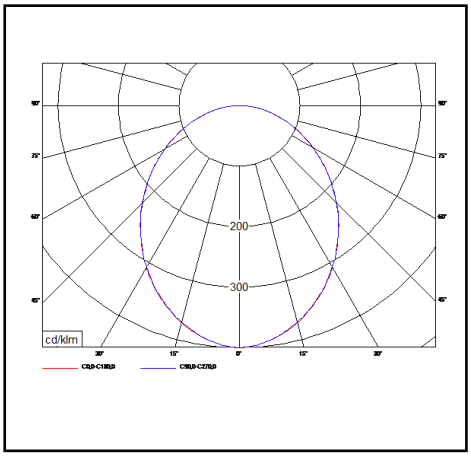

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620
Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10