





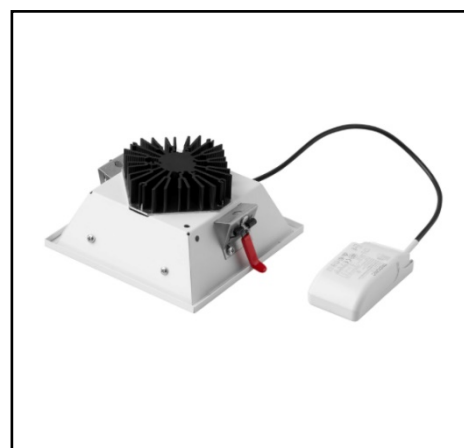
# Product data sheet

## NOVIEL II ASYM

15W – 33W 1250lm – 2850lm



<b>Description</b>	Square fixed downlight
<b>Dimensions (mm)</b>	165mm x 165mm x 79mm – 265mm x 265mm x 126mm
<b>Weight (kg)</b>	0,900kg – 1,6kg
<b>Housing</b>	Sheet steel body
<b>Colour</b>	White
<b>Optical system</b>	Matt anodised reflector Microprismatic PMMA diffuser
<b>Lighting Distribution</b>	Direct – asymmetrical 70°
<b>Unified Glare Ratio</b>	<22
<b>Colour temperature (K)</b>	3000K
<b>CRI (Ra)</b>	80
<b>SCDM</b>	3
<b>Net lumen output (25°C)</b>	1250lm – 2850lm
<b>Efficacy – LOR (lm/W)</b>	83lm/W – 89lm/W
<b>Power (driver incl.)</b>	15W – 33W
<b>Driver</b>	Separate box included
<b>IP</b>	IP 20
<b>IK</b>	IK 02
<b>Lifetime (hours)</b>	50.000 hours L90 B10
<b>Warranty</b>	5 years
<b>Origin</b>	Slovakia
<b>Norms</b>	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008
<b>Marks</b>	  



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering  
Ballingsweg 25 – 9620 Zottegem  
[info@euro-luce.be](mailto:info@euro-luce.be)  
[www.euro-luce.be](http://www.euro-luce.be)  
Tel 0032 54 55 71 10