



Product data sheet


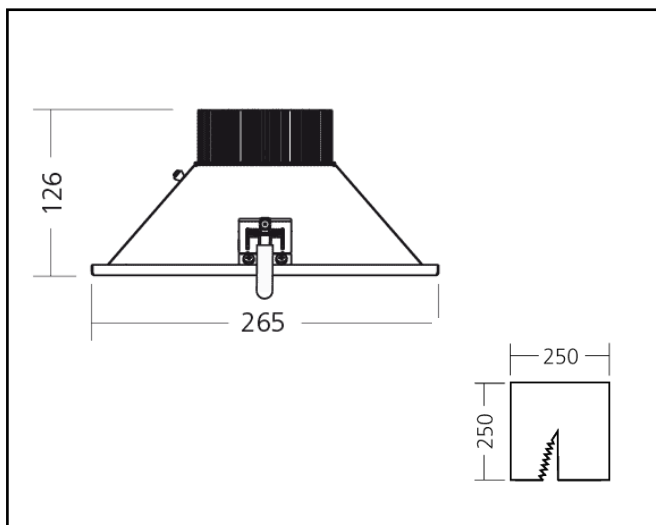


NOVIEL II L

32W 3650lm 830 80° IP40

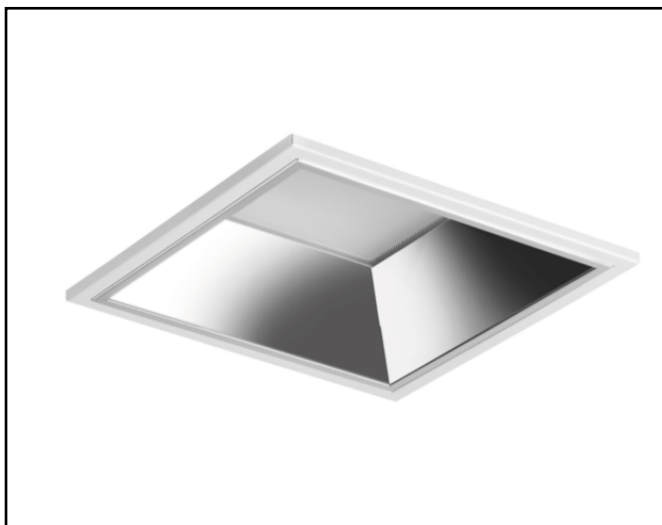

Description	Square fixed downlight
Dimensions (mm)	265mm x 265mm x 126mm
Weight (kg)	1,6 kg
Housing	Sheet steel body
Colour	White
Optical system	Polished anodised reflector - transparent PMMA cover – microprism PMMA diffusor
Lighting Distribution	Direct - symmetrical
Unified Glare Ratio	<22
Colour temperature (K)	3000K
CRI (Ra)	80
SCDM	3
Net lumen output (25°C)	3650lm
Efficacy – LOR (lm/W)	114lm/W
Power (driver incl.)	32 W
Driver	Separate box included
IP	IP 40
IK	IK 02
Lifetime (hours)	50.000 hours L90 B10
Warranty	5 years
Origin	Slovakia
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

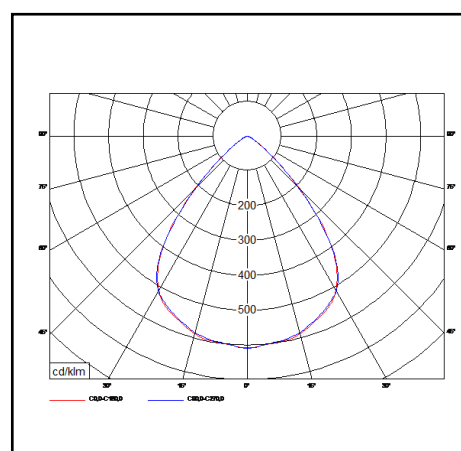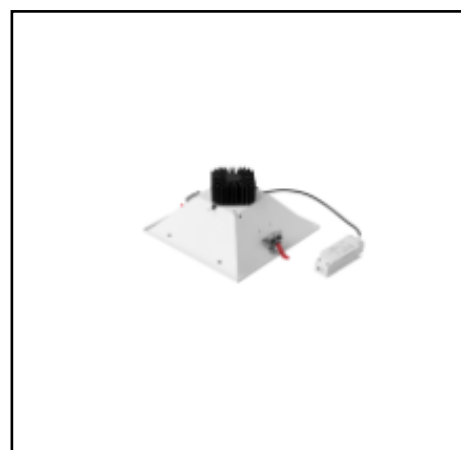

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks