


Product data sheet




GRAFIAS RECESSED

94W 10400Lm 4000K

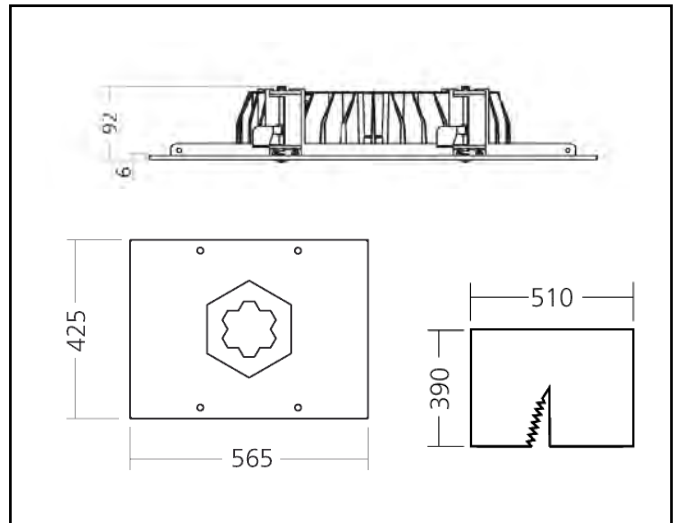

Description	Recessed highbay
Dimensions (mm)	565mm x 425mm x 92mm
Weight (kg)	10 kg
Housing	Steel sheet, painted
Colour	white
Optical system	lenses, Polished reflector
Lighting Distribution	Direct 80°
Unified Glare Ratio	UGR 25
Colour temperature (K)	4000 K
CRI (Ra)	> 80
SCDM	3
Net lumen output (25°C)	10400 lm
Efficacy – LOR (lm/W)	111 lm/W
Power (driver incl.)	94 W
Driver	Driver incorporated
IP	IP 66
IK	IK 07
Lifetime (hours)	50.000 hours L80 B10
Warranty	5 years
Origin	Slovakia
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

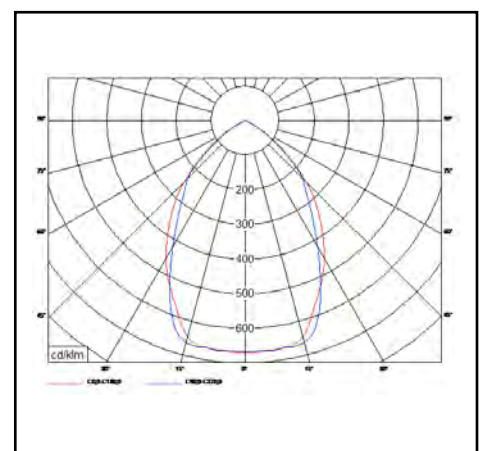

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem

info@euro-luce.be

www.euro-luce.be


Tel 0032 54 55 71 10

Marks





GRAFIAS SURFACED

94W 10400Lm 4000K

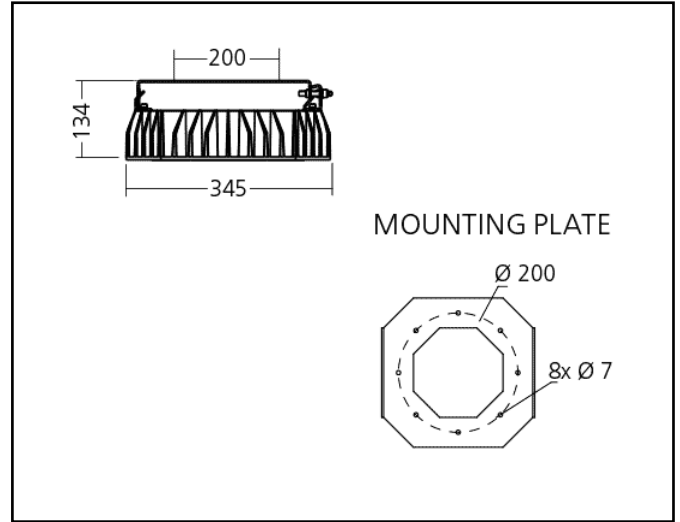

Description	Surface mounted highbay
Dimensions (mm)	345mm x 345mm x 134mm
Weight (kg)	10 kg
Housing	Steel sheet, painted
Colour	white
Optical system	lenses, Polished reflector
Lighting Distribution	Direct 80°
Unified Glare Ratio	UGR 25
Colour temperature (K)	4000 K
CRI (Ra)	> 80
SCDM	3
Net lumen output (25°C)	10400 lm
Efficacy – LOR (lm/W)	111 lm/W
Power (driver incl.)	94 W
Driver	Driver incorporated
IP	IP 66
IK	IK 07
Lifetime (hours)	50.000 hours L80 B10
Warranty	5 years
Origin	Slovakia
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

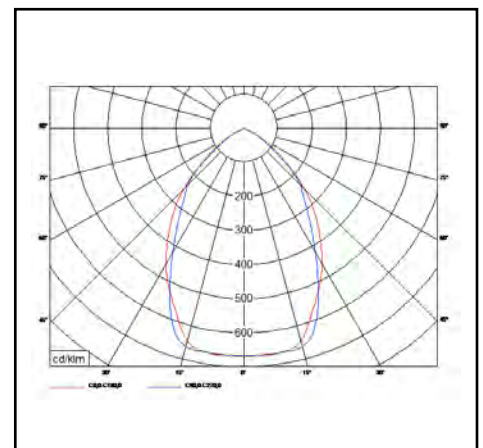

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes


Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Product data sheet





MYAR RECESSED

105W 15.300lm 840

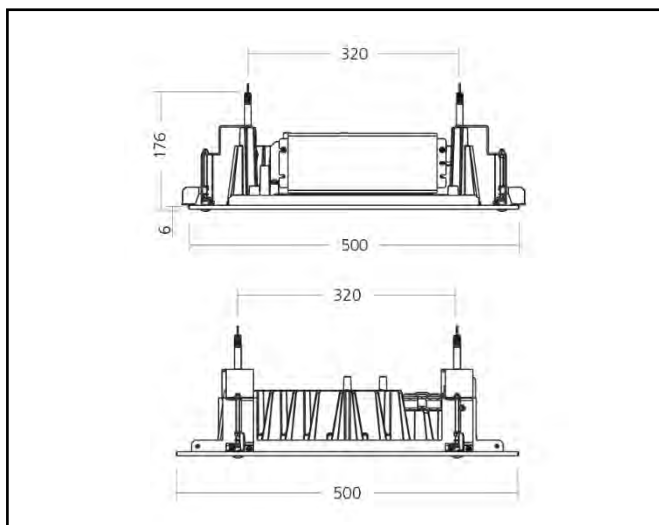

Description	Suspended highbay fixture
Dimensions (mm)	380 x 380mm x 218mm
Weight (kg)	14,300 kg
Housing	Housing: die cast alu + sheet steel
Colour	Black (Ra19005)
Optical system	PMMA + glass
Lighting Distribution	Direct 98° - symmetrical
Unified Glare Ratio	<22
Colour temperature (K)	4000 K
CRI (Ra)	80
SCDM	3
Net lumen output (25°C)	15.300 lm
Efficacy – LOR (lm/W)	146 lm/W
Power (driver incl.)	105W
Driver	Driver incorporated Non dim, DALI, DSI or 1-10V DIM
IP	IP 66
IK	IK 09
Lifetime (hours)	100.000 hours L90 B10
Warranty	5 years
Origin	Slovakja
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

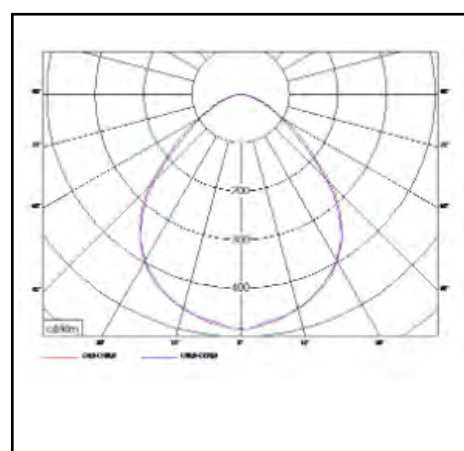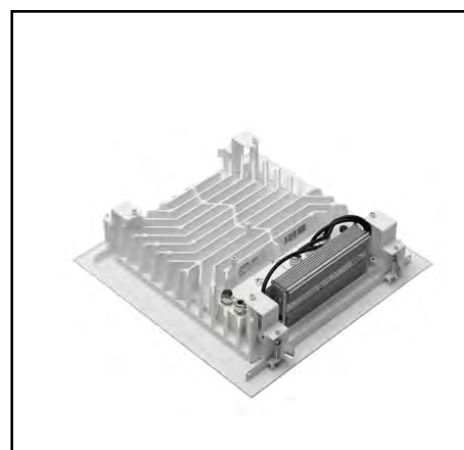

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10


Marks





Product data sheet



MYAR SURFACED

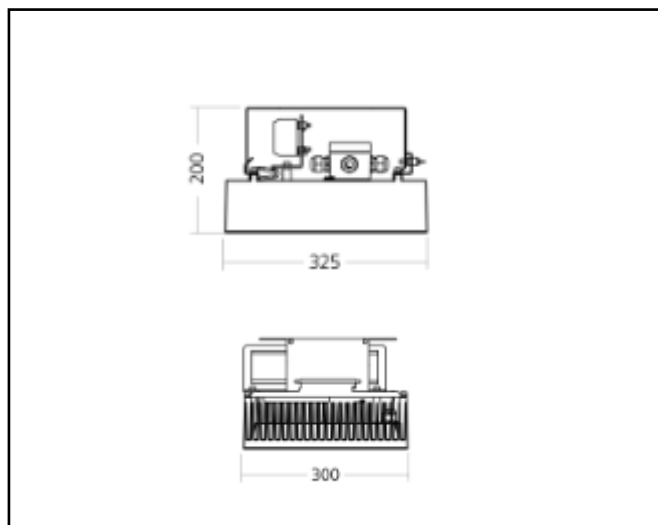

Description	Surface mounted fixture
Dimensions (mm)	325 x 300mm x 200mm
Weight (kg)	9,600 kg
Housing	Housing: die cast alu + sheet steel
Colour	Black (Ral9005)
Optical system	PMMA + glass
Lighting Distribution	Direct 84° - symmetrical
Unified Glare Ratio	<19
Colour temperature (K)	4000 K
CRI (Ra)	80
SCDM	3
Net lumen output (25°C)	12.000 lm
Efficacy – LOR (lm/W)	133 lm/W
Power (driver incl.)	90W
Driver	Driver incorporated Non dim, DALI, DSI or 1-10V DIM
IP	IP 65
IK	IK 07
Lifetime (hours)	50.000 hours L80 B10
Warranty	5 years
Origin	Slowakja
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

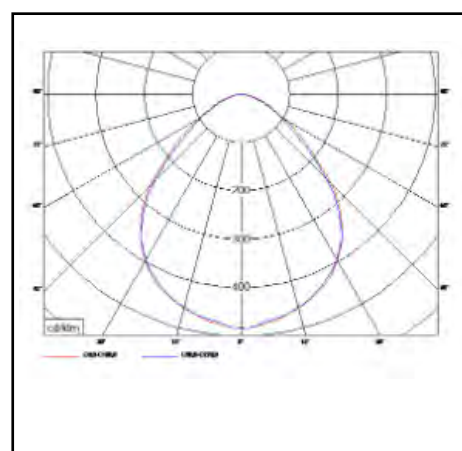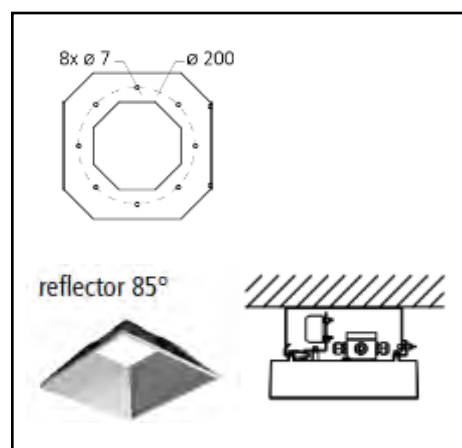

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620
Zottegem

info@euro-luce.be
www.euro-luce.be

Tel 0032 54 55 71 10


Marks





Product data sheet



SPORT LED RECESSED

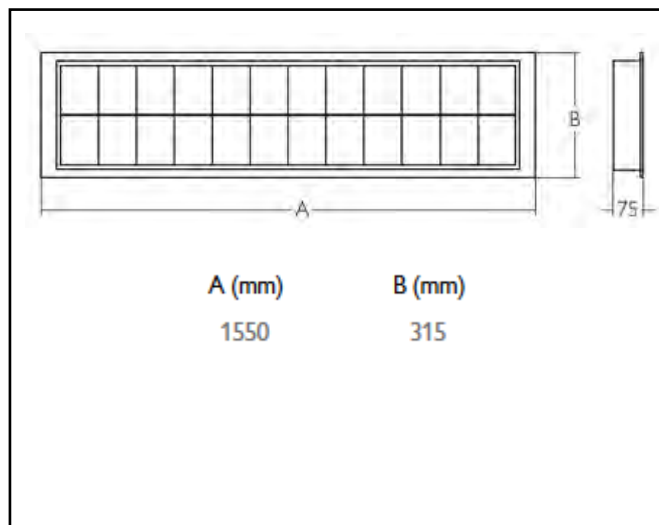

Description	Recessed luminaire
Dimensions (mm)	1550 x 315mm x 75mm
Weight (kg)	10,800 kg
Housing	Housing: 0,6mm sheet steel
Colour	White (Ral9003)
Optical system	Reinforced white louvre with 4mm steel rods, secured by 4 screws and 2 steel wires
Lighting Distribution	Direct - symmetrical
Unified Glare Ratio	<22
Colour temperature (K)	4000 K – other colours on request
CRI (Ra)	80 – 90 on request
SCDM	3
Net lumen output (25°C)	14.500 lm
Efficacy – LOR (lm/W)	110 lm/W
Power (driver incl.)	130W
Driver	Driver incorporated Non dim, DALI, DSI or 1-10V DIM
IP	IP 20
IK	Ballproof
Lifetime (hours)	50.000 hours L80 B50
Warranty	5 years
Origin	Slovakia
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

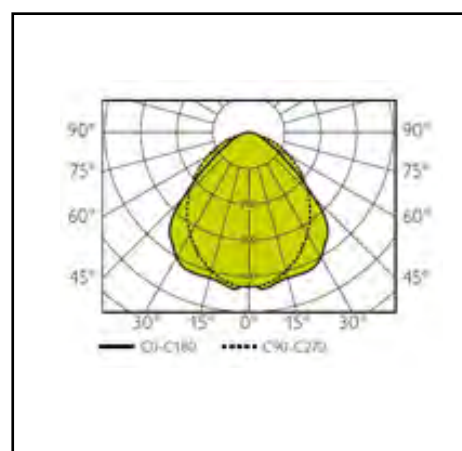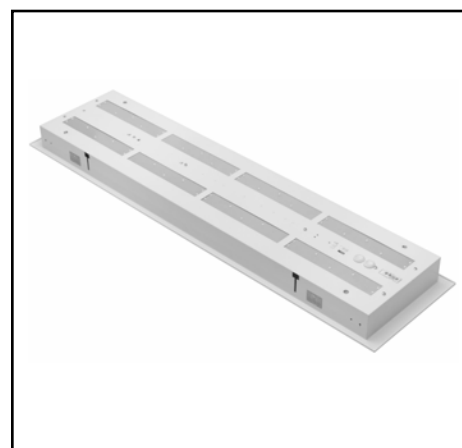

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620
Zottegem

info@euro-luce.be
www.euro-luce.be

Tel 0032 54 55 71 10

Marks




Product data sheet





GHADA 2 SURFACED

159W 19.650lm 840

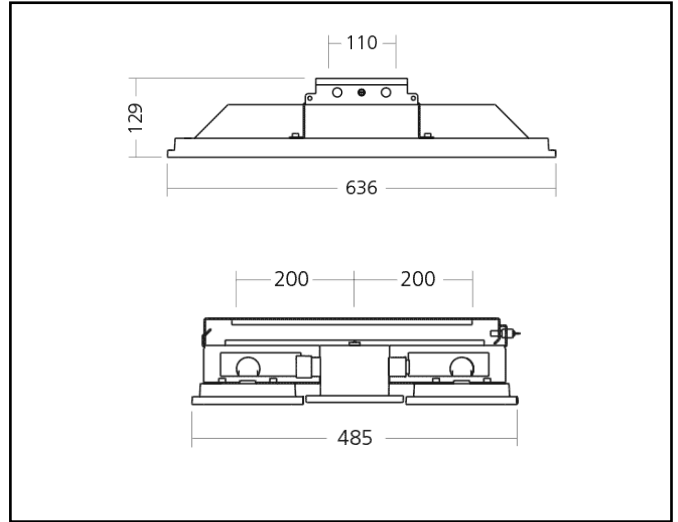

Description	Suspended highbay fixture
Dimensions (mm)	485mm x 636mm x 129mm
Weight (kg)	14,100 kg
Housing	Housing: die cast alu + sheet steel
Colour	Black (Ral9005)
Optical system	PMMA + glass
Lighting Distribution	Direct 30°
Unified Glare Ratio	<22
Colour temperature (K)	4000 K
CRI (Ra)	80
SCDM	3
Net lumen output (25°C)	19.650 lm
Efficacy – LOR (lm/W)	124 lm/W
Power (driver incl.)	159W
Driver	Driver incorporated Non dim, DALI, DSI or 1-10V DIM
IP	IP 65
IK	IK 07
Lifetime (hours)	100.000 hours L90 B10
Warranty	5 years
Origin	Slowakja
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

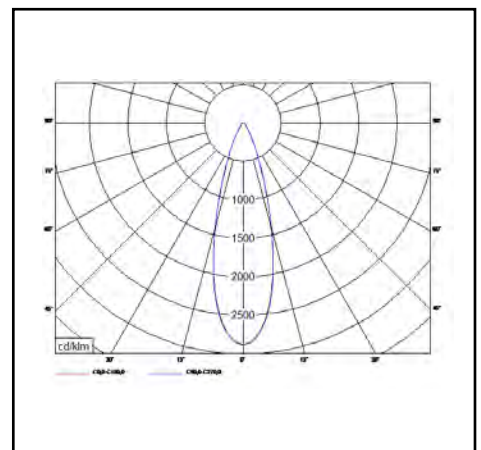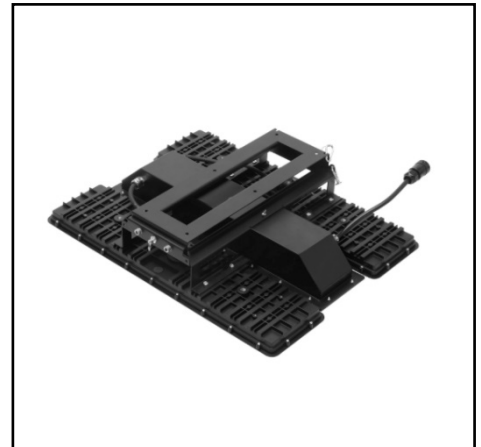

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet





KONAK

100W 12.150lm 840 80°

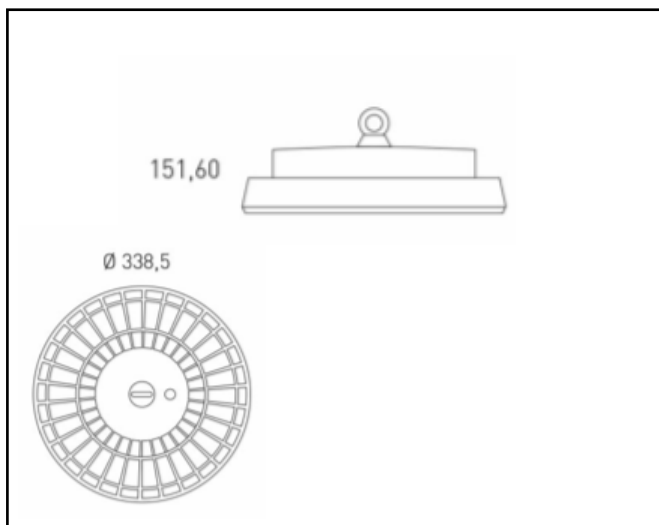

Description	Suspended luminaire
Dimensions (mm)	151,6mm x 338,5mm
Weight (kg)	6,1 kg
Housing	Body die-cast aluminium
Colour	Grey
Optical system	Cover polycarbonate
Lighting Distribution	Medium Beam – 80°
Unified Glare Ratio	<22
Colour temperature (K)	4000 K
CRI (Ra)	> 80
SCDM	5
Net lumen output (25°C)	12.150 lm
Efficacy – LOR (lm/W)	121 lm/W
Power (driver incl.)	100 W
Driver	Incorporated – non dimmable DALI or 1-10v on request
IP	IP 65
IK	IK 08
Lifetime (hours)	100.000 hours L70 B50
Warranty	5 years
Origin	Spain
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

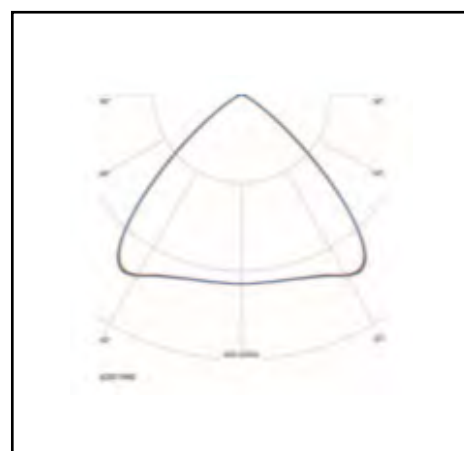

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10


Marks

Product data sheet




PARIDA ECO

150W 16.300lm 840 60°

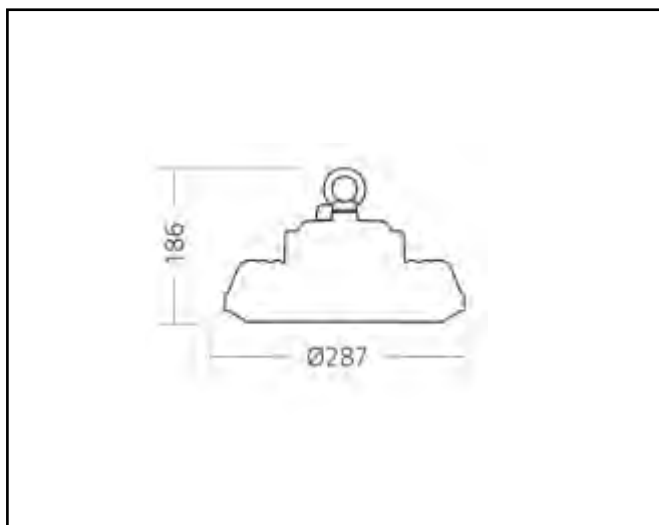

Description	Suspended luminaire
Dimensions (mm)	287mm x 186mm
Weight (kg)	4,1 kg
Housing	Body die-cast aluminium
Colour	Black (RAL9005)
Optical system	Cover polycarbonate
Lighting Distribution	Direct – rotational symmetrical 60°
Unified Glare Ratio	<22
Colour temperature (K)	4000 K
CRI (Ra)	> 80
SCDM	5
Net lumen output (25°C)	16,300 lm
Efficacy – LOR (lm/W)	110 lm/W
Power (driver incl.)	150 W
Driver	Incorporated – non dimmable DALI or 1-10v on request
IP	IP 65
IK	IK 08
Lifetime (hours)	50.000 hours L80 B50
Warranty	5 years
Origin	Slovakia
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

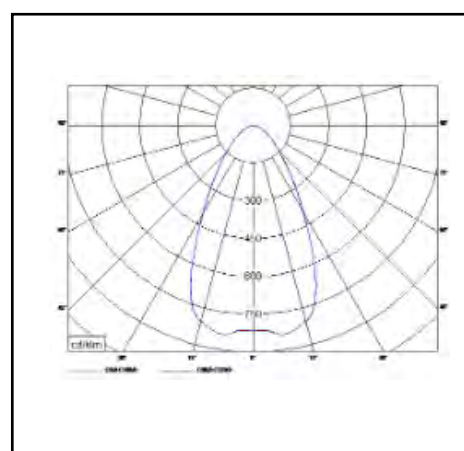

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10


Marks

Product data sheet




PARIDA

100W 13.500lm 840 60°

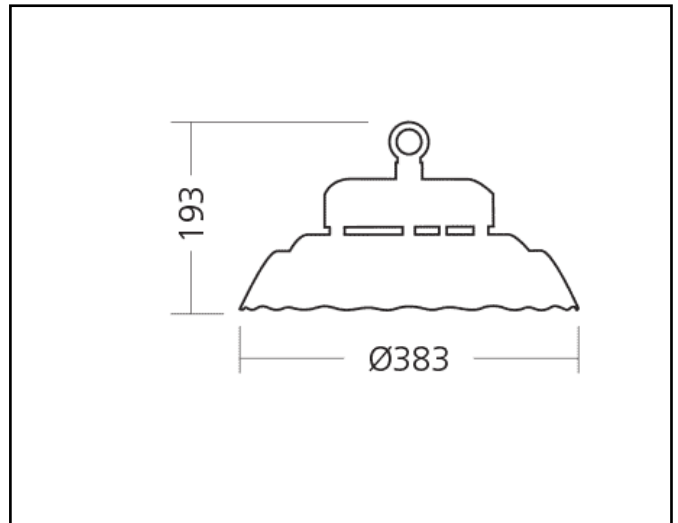

Description	Suspended luminaire
Dimensions (mm)	383mm x 193mm
Weight (kg)	6,5 kg
Housing	Body die-cast aluminium
Colour	Black (RAL9005)
Optical system	Cover polycarbonate
Lighting Distribution	Direct – rotational symmetrical 90°
Unified Glare Ratio	<22
Colour temperature (K)	4000 K
CRI (Ra)	> 80
SCDM	5
Net lumen output (25°C)	13,500 lm
Efficacy – LOR (lm/W)	135 lm/W
Power (driver incl.)	100 W
Driver	Incorporated – non dimmable DALI or 1-10v on request
IP	IP 65
IK	IK 08
Lifetime (hours)	50.000 hours L80 B50
Warranty	5 years
Origin	Slovakia
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

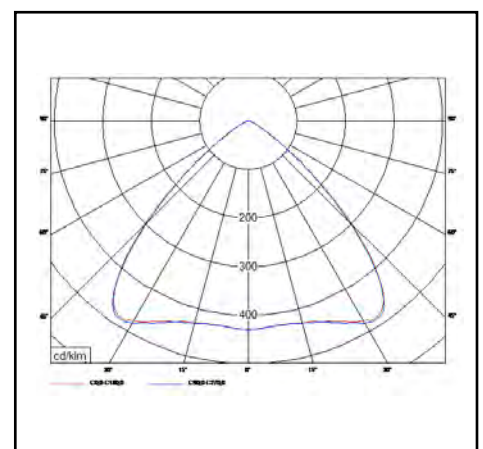

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10


Marks

Product data sheet





Poland 150

150W 20.050lm 840 90°

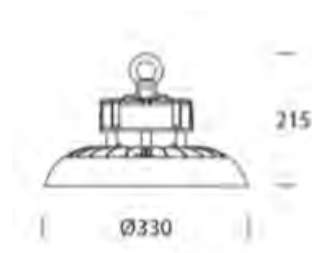

Description	Suspended luminaire
Dimensions (mm)	215mm x 330mm
Weight (kg)	4,70 kg
Housing	Body die-cast aluminium
Colour	Black (RAL9005)
Optical system	Cover polycarbonate
Lighting Distribution	Medium Beam – 90°<22
Unified Glare Ratio	4000 K
Colour temperature (K)	
CRI (Ra)	> 80
SCDM	5
Net lumen output (25°C)	20.050 lm
Efficacy – LOR (lm/W)	134 lm/W
Power (driver incl.)	150 W
Driver	Incorporated 1-10v dimmable
IP	IP 65
IK	IK 08
Lifetime (hours)	50.000 hours L70 B50
Warranty	5 years
Origin	Spain
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

Marks  

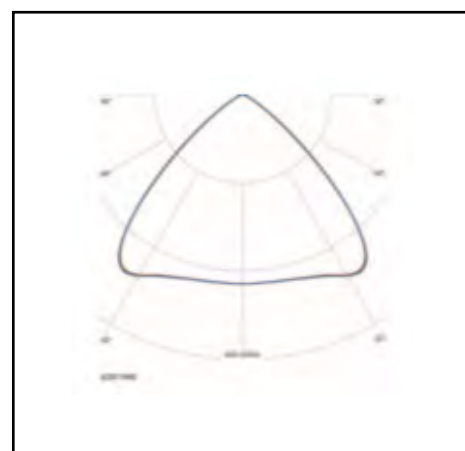

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes


Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Product data sheet




SWEA MB

96,5W 14,000lm 840

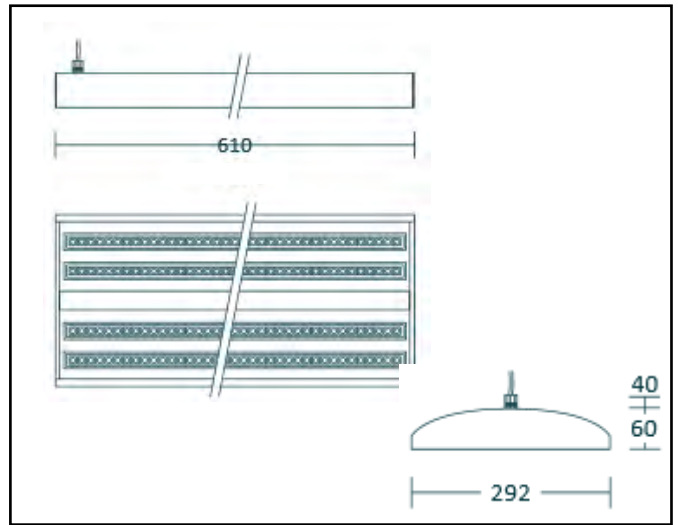

Description	Surface mounted or suspended fixture
Dimensions (mm)	610 x 292mm x100mm
Weight (kg)	8,500 kg
Housing	Housing: extruded aluminium with cooling fins preventing dust collection
Colour	grey
Optical system	Clear tempered safety glass IK10
Lighting Distribution	Medium beam
Unified Glare Ratio	<22
Colour temperature (K)	4000 K – other colours on request
CRI (Ra)	80
SCDM	3
Net lumen output (25°C)	14.000 lm
Efficacy – LOR (lm/W)	145 lm/W
Power (driver incl.)	96,5W
Driver	Driver incorporated Non dim, DALI, DSI or 1-10V DIM
IP	IP66
IK	IK10
Lifetime (hours)	100.000 hours L80 B50
Warranty	5 years
Origin	Germany
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

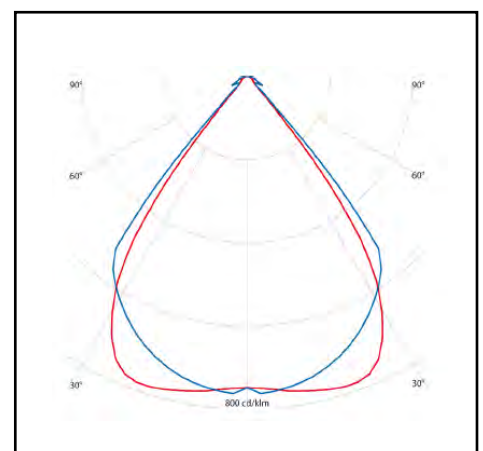

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet





VIDAR II

110W 15.000lm 840 90°

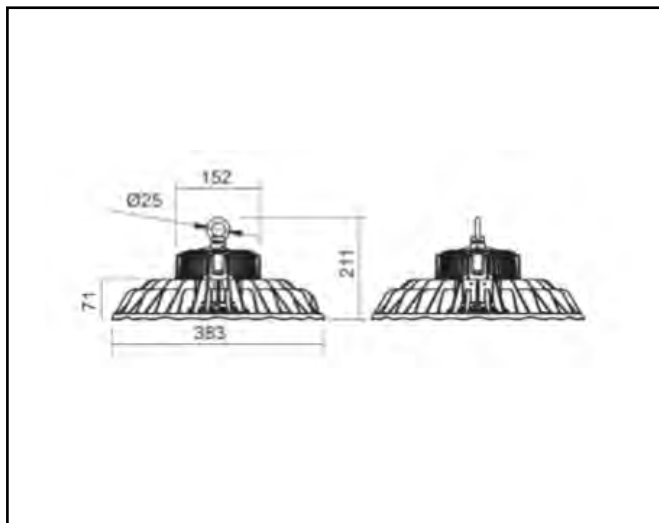

Description	Suspended luminaire
Dimensions (mm)	220mm x 171,4mm
Weight (kg)	6 kg
Housing	Body die-cast aluminium
Colour	Black (RAL9005)
Optical system	Cover polycarbonate
Lighting Distribution	Medium Beam – 90°
Unified Glare Ratio	<22
Colour temperature (K)	4000 K
CRI (Ra)	> 80
SCDM	5
Net lumen output (25°C)	15.000 lm
Efficacy – LOR (lm/W)	136 lm/W
Power (driver incl.)	110 W
Driver	Incorporated – non dimmable DALI or 1-10v on request
IP	IP 65
IK	IK 08
Lifetime (hours)	100.000 hours L70 B50
Warranty	5 years
Origin	Germany
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

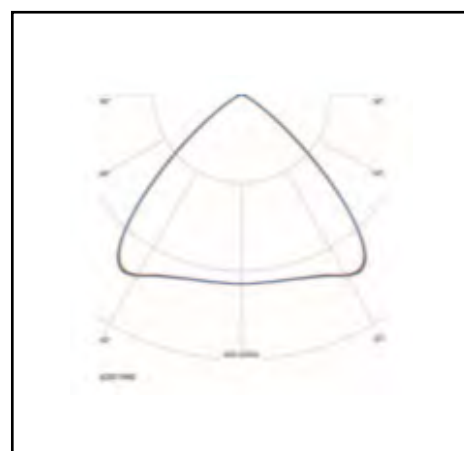

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks