

Product data sheet





ACELIN LINE D/I

59W – 74W 5500lm – 6900lm



Description	Suspended line luminaire
Dimensions (mm)	1166mm x 72mm x 85mm – 1446 x 72mm x 85mm
Weight (kg)	4,1 kg
Housing	Steel sheet, painted
Colour	White (RAL9003)
Optical system	Prismatic PMMA diffuser + polished metal PC reflector
Lighting Distribution	Direct 90°
Unified Glare Ratio	<19
Colour temperature (K)	3000K – 4000K
CRI (Ra)	80
SCDM	3
Net lumen output (25°C)	5500lm – 6900lm
Efficacy – LOR (lm/W)	93 lm/W
Power (driver incl.)	59W – 74W
Driver	Driver incorporated, not dimmable DALI or 1-10v on request
IP	IP 40
IK	IK 02
Lifetime (hours)	50.000 hours L80 B10
Warranty	5 years
Origin	Slovakia
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

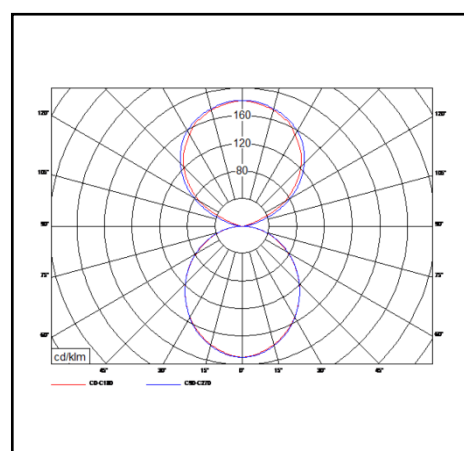

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks

