


Product data sheet





AILIN LINE

37W – 47W 2950lm – 3650lm

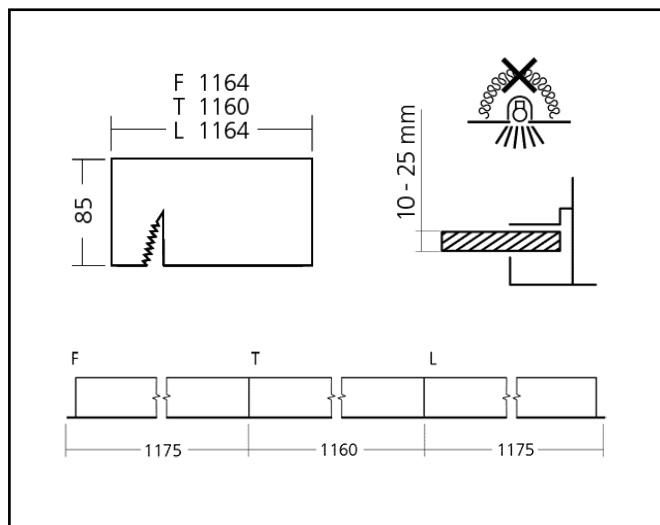

Description	Ceiling recessed luminaire – determined for continuous installation
Dimensions (mm)	F:1175mm x 100mm x 70mm T:1160mm x 100mm x 70mm L:1175mm x 100mm x 70mm
Weight (kg)	2,8 kg
Housing	Extruded aluminium
Colour	elox
Optical system	PMMA diffusor opal
Lighting Distribution	direct
Unified Glare Ratio	<25
Colour temperature (K)	3000K – 4000K
CRI (Ra)	>80
SCDM	3
Net lumen output (25°C)	2950lm – 3650lm
Efficacy – LOR (lm/W)	78lm/W – 80lm/W
Power (driver incl.)	37W – 47W
Driver	Electronic control gear (non dim) Dali on request
IP	IP 40
IK	IK 02
Lifetime (hours)	50.000 hours L80 B10
Warranty	5 years
Origin	Slovakia
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

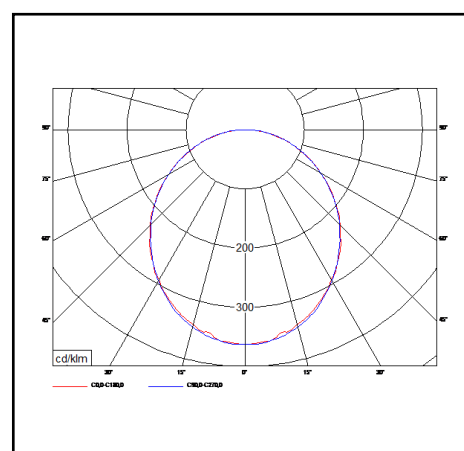

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks

