


Product data sheet





AIR IB

21W – 36W 2250lm – 3800lm 24° - 40°

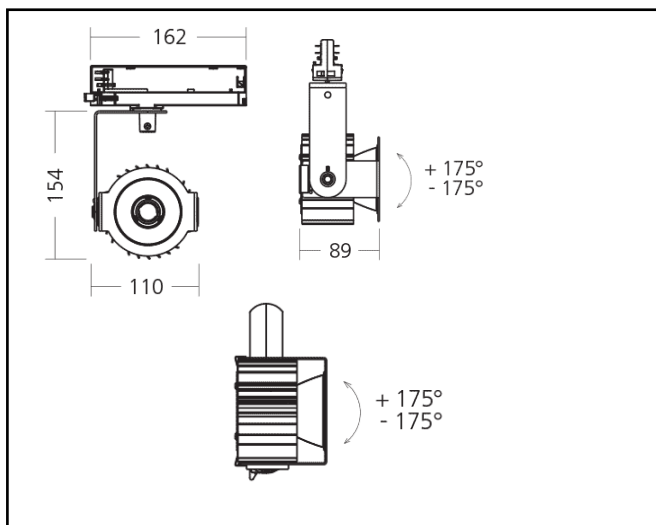

Description	Suspended or ceiling surfaced lighting track system – suitable for ONETRACK
Dimensions (mm)	162mm x 88mm x 146mm
Weight (kg)	0,700 kg
Housing	Steel sheet, painted
Colour	Black(B), white(W) or silver grey(G)
Optical system	Facet, anodized reflector, COB
Lighting Distribution	Symmetric, 24° - 40°
Unified Glare Ratio	UGR 20
Colour temperature (K)	3000 K – 4000K
CRI (Ra)	> 85
SCDM	3
Net lumen output (25°C)	2250lm – 3800lm
Efficacy – LOR (lm/W)	107 lm/W
Power (driver incl.)	21W – 36W
Driver	Driver incorporated, not dimmable
IP	IP 20
IK	IK 02
Lifetime (hours)	50.000 hours L80 B10
Warranty	5 years
Origin	Slovakija
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008
Marks	CE

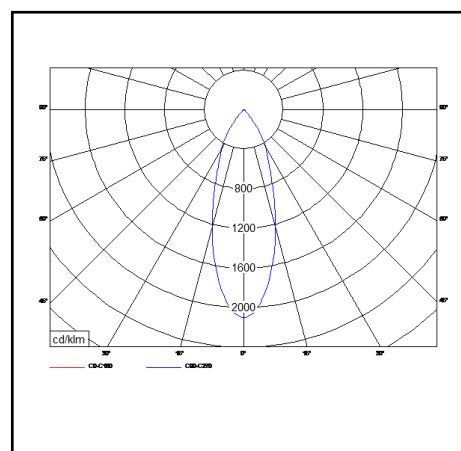

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10