




Product data sheet

Aros Single

34W + 15W 4090lm + 1240lm

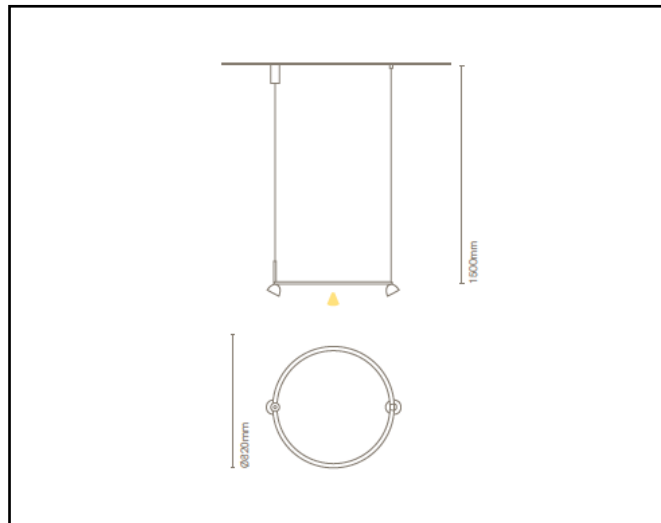

Description	Suspended fixture
Dimensions (mm)	820mm x 820mm
Weight (kg)	5,8 kg
Housing	Painted aluminium
Colour	black
Optical system	Led line
Lighting Distribution	Direct, indirect and spot light
Unified Glare Ratio	<28
Colour temperature (K)	2700K – 3000K
CRI (Ra)	80
SCDM	3
Net lumen output (25°C)	4090lm + 1240lm
Efficacy – LOR (lm/W)	108 lm/W
Power (driver incl.)	34W + 15W
Driver	Driver incorporated, not dimmable
IP	IP 20
IK	IK 08
Lifetime (hours)	50.000 hours L80 B10
Warranty	5 years
Origin	Spain
Norms	



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks