

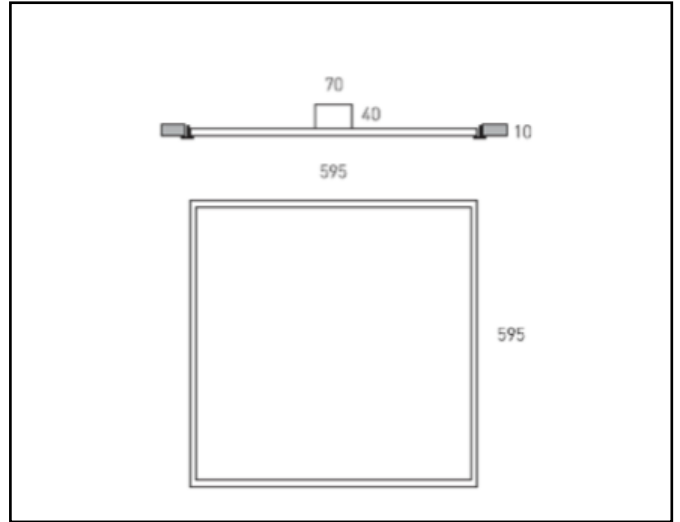
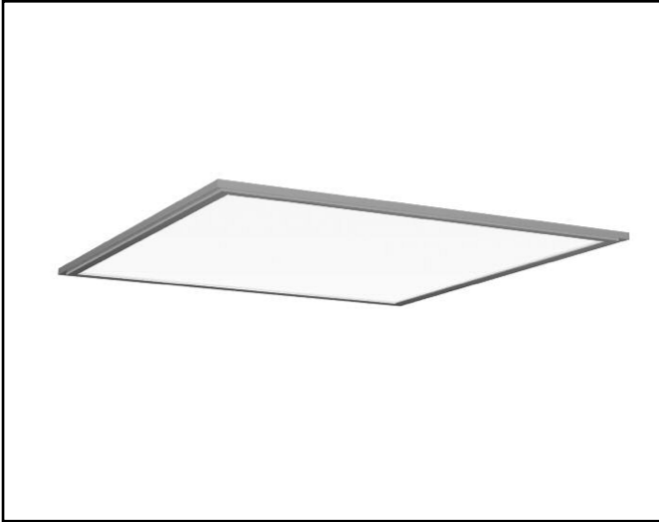


LUP LED PANEL

33,5W 4357lm 60x60



Description	Recessed luminaire, module 600x600mm
Dimensions (mm)	595 x 595x 40mm – LED Backlight
Weight (kg)	2,1kg
Housing	aluminium
Colour	white
Optical system	Prismatic PMMA diffuser
Lighting Distribution	direct
Unified Glare Ratio	UGR <19
Colour temperature (K)	3000K – 4000K
CRI (Ra)	80
SCDM	3
Net lumen output (25°C)	4357lm
Efficacy – LOR (lm/W)	130 lm/W
Power (driver incl.)	33,5W
Driver	Driver included(separate), flickerfree DALI or 1-10v on request
IP	20
IK	02
Lifetime (hours)	60.000 H L70 B20
Warranty	10 years
Origin	The Netherlands
Norms	EMC 2004/108/EC RoHS 2001/65/EC



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10