


Product data sheet




PARIDA ECO

100W – 200W 11100lm – 22400lm

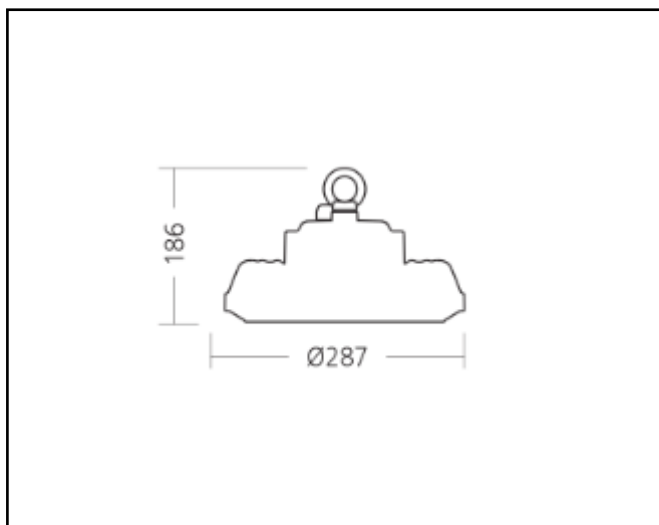

Description	Suspended luminaire
Dimensions (mm)	287mm x 186mm
Weight (kg)	4,1 kg
Housing	Body die-cast aluminium
Colour	Black (RAL9005)
Optical system	Cover polycarbonate
Lighting Distribution	Direct – rotational symmetrical 60°
Unified Glare Ratio	<22
Colour temperature (K)	4000 K
CRI (Ra)	> 80
SCDM	5
Net lumen output (25°C)	11100lm – 22400lm
Efficacy – LOR (lm/W)	109lm/W – 112lm/W
Power (driver incl.)	100W – 200W
Driver	Incorporated – non dimmable DALI or 1-10v on request
IP	IP 65
IK	IK 08
Lifetime (hours)	50.000 hours L80 B50
Warranty	5 years
Origin	Slovakia
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

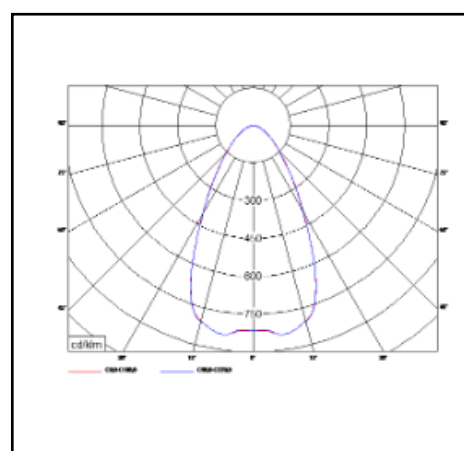

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks