


# Product data sheet




## PARIDA

100W – 200W 13500lm – 26500lm

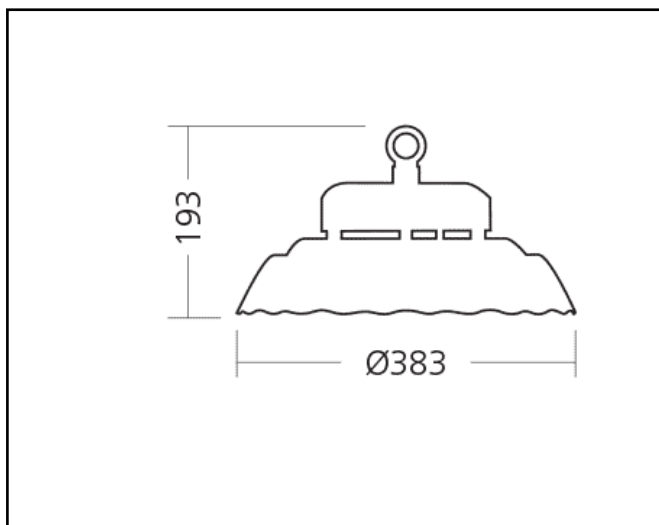

|                                |   |
|--------------------------------|---|
| <b>Description</b>             | Suspended luminaire                                     |
| <b>Dimensions (mm)</b>         | 383mm x 193mm   |
| <b>Weight (kg)</b>             | 6,5 kg  |
| <b>Housing</b>                 | Body die-cast aluminium                                 |
| <b>Colour</b>                  | Black (RAL9005)   |
| <b>Optical system</b>          | Cover polycarbonate                                     |
| <b>Lighting Distribution</b>   | Direct – rotational symmetrical 50° - 90°               |
| <b>Unified Glare Ratio</b>     | <22   |
| <b>Colour temperature (K)</b>  | 4000 K  |
| <b>CRI (Ra)</b>                | > 80  |
| <b>SCDM</b>                    | 5   |
| <b>Net lumen output (25°C)</b> | 13500lm – 26500lm                                       |
| <b>Efficacy – LOR (lm/W)</b>   | 132lm/W – 135lm/W                                       |
| <b>Power (driver incl.)</b>    | 100W – 200W   |
| <b>Driver</b>                  | Incorporated – non dimmable<br>DALI or 1-10v on request |
| <b>IP</b>                      | IP 65   |
| <b>IK</b>                      | IK 08   |
| <b>Lifetime (hours)</b>        | 50.000 hours L70 B50                                    |
| <b>Warranty</b>                | 5 years   |
| <b>Origin</b>                  | Slowakja  |
| <b>Norms</b>                   | LVD 2006/95/EC<br>EMC 2004/108/EC<br>RoHS 2001/65/EC    |

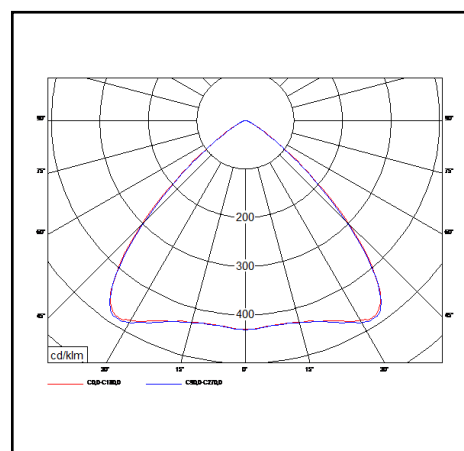

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering  
Ballingsweg 25 – 9620 Zottegem  
[info@euro-luce.be](mailto:info@euro-luce.be)  
[www.euro-luce.be](http://www.euro-luce.be)  
Tel 0032 54 55 71 10

Marks