Product data sheet

PLAST 2 LED

12W – 14W 1050lm – 1450lm

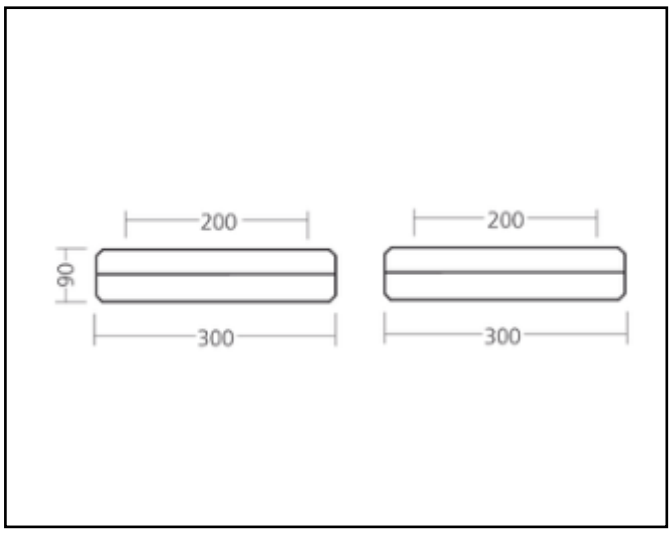

Description	Surface mounted Fixture
Dimensions (mm)	300mm x 300mm x 90mm
Weight (kg)	2,0 kg
Housing	Diffuser PMMA
Colour	Housing white
Optical system	Opal PMMA diffuser
Lighting Distribution	direct
Unified Glare Ratio	<25
Colour temperature (K)	3000K – 4000K
CRI (Ra)	80
SCDM	3
Net lumen output (25°C)	1050lm – 1450lm
Efficacy – LOR (lm/W)	88lm/W – 104lm/W
Power (driver incl.)	12W – 14W
Driver	Driver incorporated, not dimmable
IP	IP 65
IK	IK 02
Lifetime (hours)	50.000 hours L80 B10
Warranty	5 years
Origin	Slowakja
Norms	
Marks	CE ⏚

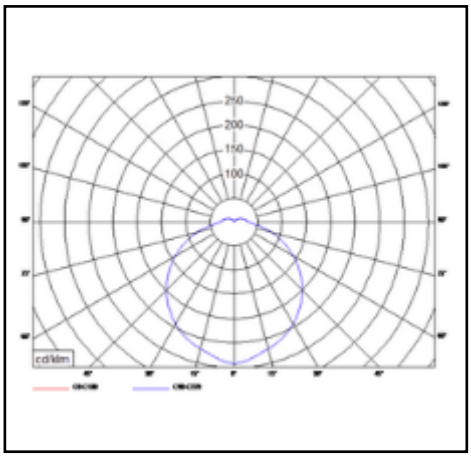

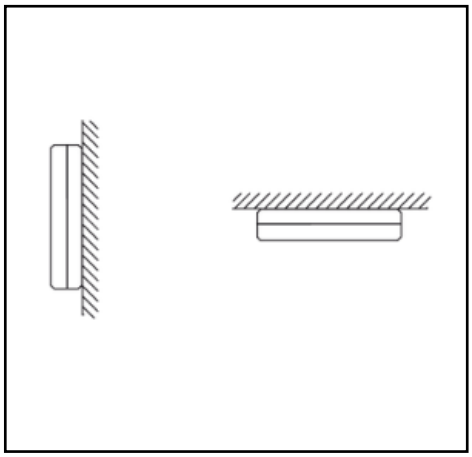

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10