


Product data sheet





VIALED EVO – IP65

Emergency lighting

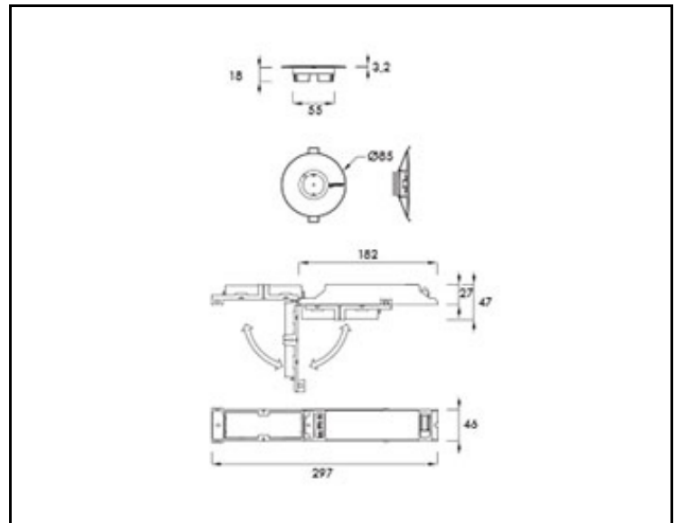

Description	Surface mounted emergency lighting
Dimensions (mm)	85mm x 55mm x 18mm
Weight (kg)	1,600 kg
Housing	fireproof plastic housing
Colour	White
Optical system	Fireproof plastic diffusor
Lighting Distribution	Emergency lighting
Unified Glare Ratio	N/A
Colour temperature (K)	4000
CRI (Ra)	80
SCDM	N/A
Net lumen output (25°C)	320lm – 580lm
Efficacy – LOR (lm/W)	37lm/W – 74lm/W
Power (driver incl.)	5,3W – 7,8W
Driver	Included – 1h non maintained
IP	IP 42 – 65
IK	IK 40
Lifetime (hours)	50.000h L80 B10
Warranty	5 years
Origin	Italy
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10