

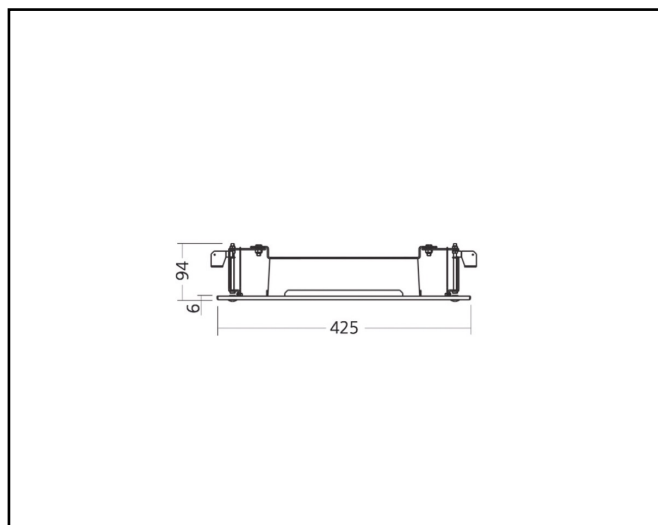
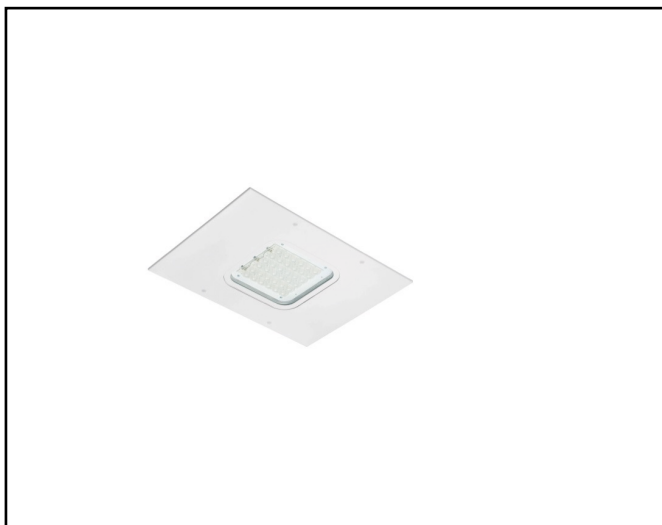


# Product data sheet

Doros / IP65



<b>Description</b>	Outdoor, under canopy
<b>Dimensions (mm)</b>	565mm x 425mm x 94mm
<b>Weight (kg)</b>	7,300kg
<b>Housing</b>	Die-cast aluminium
<b>Colour</b>	White
<b>Optical system</b>	Lenses
<b>Lighting Distribution</b>	52°, direct
<b>Unified Glare Ratio</b>	.
<b>Colour temperature (K)</b>	4000K
<b>CRI (Ra)</b>	80
<b>SCDM</b>	.
<b>Net lumen output (25°C)</b>	7300 - 10500lm
<b>Efficacy – LOR (lm/W)</b>	107 - 135
<b>Power (driver incl.)</b>	54 - 98W
<b>Driver</b>	.
<b>IP</b>	65
<b>IK</b>	08
<b>Lifetime (hours)</b>	50.000h L90 B10
<b>Warranty</b>	5 years
<b>Origin</b>	Slovakia
<b>Norms</b>	.



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering  
Ballingsweg 25 – 9620  
Zottegem

[info@euro-luce.be](mailto:info@euro-luce.be)  
[www.euro-luce.be](http://www.euro-luce.be)

Tel 0032 54 55 71 10

**Marks**                      The CE mark, consisting of the letters 'C' and 'E' in a stylized font.