


Product data sheet





FULGOR

24w 2300lm – 2680lm

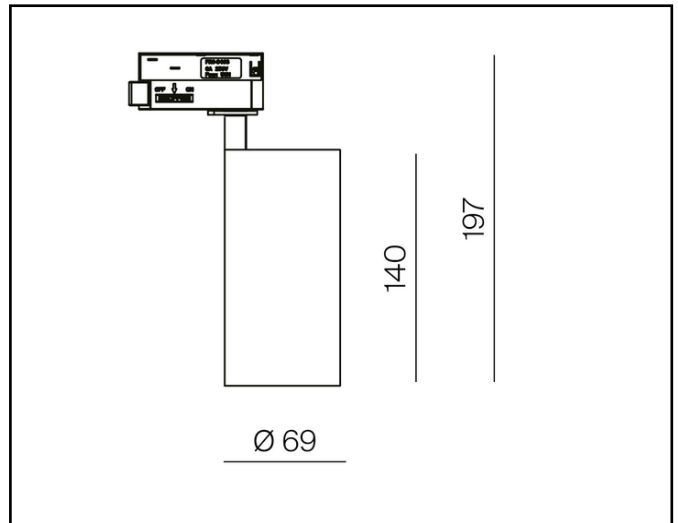

Description	3f-track spot
Dimensions (mm)	197mm x 140mm x 69mm
Weight (kg)	0,900 kg
Housing	Steel sheet, painted
Colour	Black(B) or white(W)
Optical system	Facet, anodized reflector, BRIDGELUX
Lighting Distribution	Symmetric, 48°
Unified Glare Ratio	UGR 20
Colour temperature (K)	3000K – 4000K
CRI (Ra)	> 90
SCDM	3
Net lumen output (25°C)	2300lm – 2680lm
Efficacy – LOR (lm/W)	95lm/W – 111lm/W
Power (driver incl.)	24W
Driver	Driver incorporated, not dimmable
IP	IP 20
IK	IK 02
Lifetime (hours)	50.000 hours L70 B30
Warranty	5 years
Origin	San Marino
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC

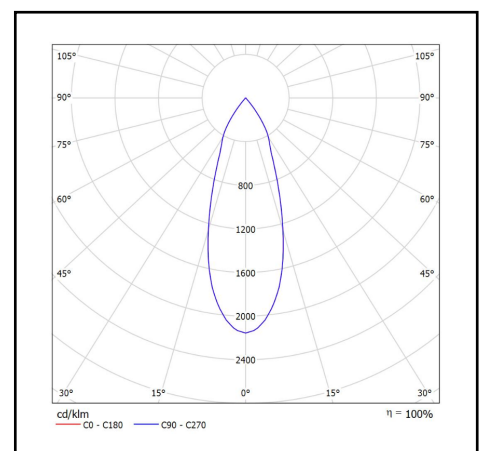

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks

