




Product data sheet

ATEX20 MINI LED

20W – 2400lm – 110° - 5700K

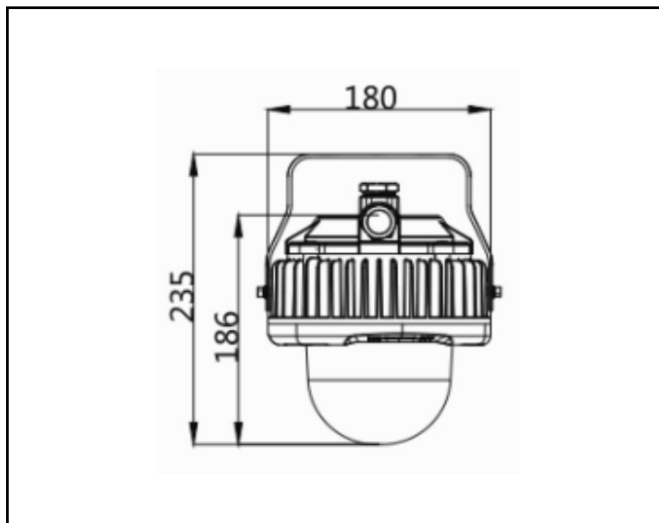

Description	Surface mounted LED fixture to work in flammable and explosive environments for places with low ceilings ATEX category: II 2G Ex db IIC T6 Gb ECM 18 ATEX 2599
Dimensions (mm)	180mm x 235mm
Weight (kg)	3,2 kg
Housing	Injected aluminium with oven painted coating and elongated watertight protective glass
Colour	Grey
Optical system	Elongated watertight protective glass – 110°
Lighting Distribution	Direct
Unified Glare Ratio	22
Colour temperature (K)	5700K
CRI (Ra)	>70
SCDM	3
Net lumen output (25°C)	2400lm
Efficacy – LOR (lm/W)	120lm/W
Power (driver incl.)	20 W
Driver	Included
IP	IP 66
IK	IK 08
Lifetime (hours)	100.000h L80 B10
Warranty	5 years
Origin	Spain
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC EN-60079-0:2012+A11:2013 EN-60079-1:2014 / EN-60079-28:2015 / EN-60079-31:2014
Marks	CE Ex

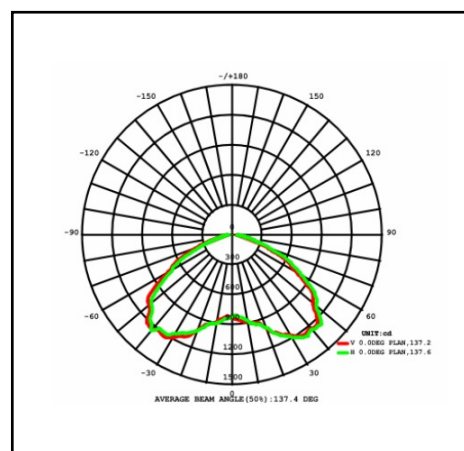


All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10


Product data sheet

ATEX20 MINI LED

30W – 3600lm – 110° - 5700K

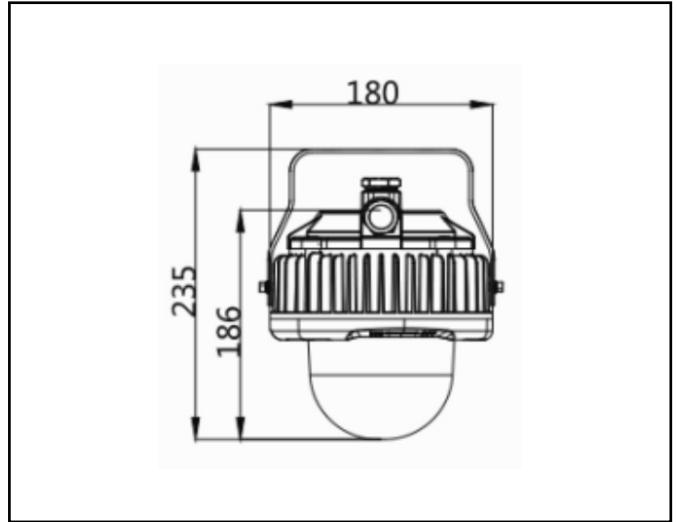

Description	Surface mounted LED fixture to work in flammable and explosive environments for places with low ceilings ATEX category: II 2G Ex db IIC T6 Gb ECM 18 ATEX 2599
Dimensions (mm)	180mm x 235mm
Weight (kg)	3,2 kg
Housing	Injected aluminium with oven painted coating and elongated watertight protective glass
Colour	Grey
Optical system	Elongated watertight protective glass – 110°
Lighting Distribution	Direct
Unified Glare Ratio	22
Colour temperature (K)	5700K
CRI (Ra)	>70
SCDM	3
Net lumen output (25°C)	3600lm
Efficacy – LOR (lm/W)	120lm/W
Power (driver incl.)	30 W
Driver	Included
IP	IP 66
IK	IK 08
Lifetime (hours)	100.000h L80 B10
Warranty	5 years
Origin	Spain
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC EN-60079-0:2012+A11:2013 EN-60079-1:2014 / EN-60079-28:2015 / EN-60079-31:2014
Marks	CE Ex

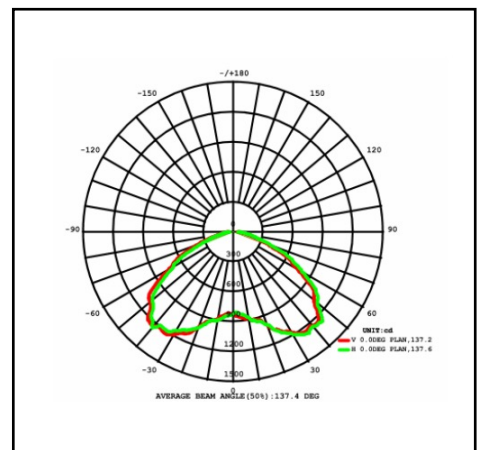


All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10


Product data sheet

ATEX20 MINI LED

40W – 4800lm – 110° - 5700K

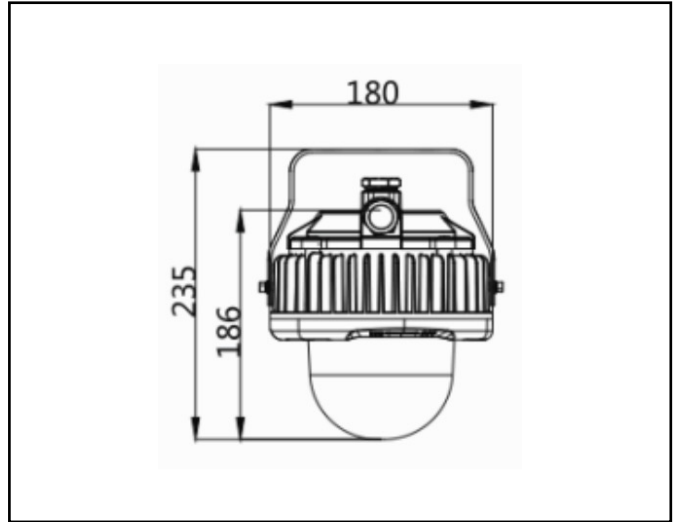

Description	Surface mounted LED fixture to work in flammable and explosive environments for places with low ceilings ATEX category: II 2G Ex db IIC T6 Gb ECM 18 ATEX 2599
Dimensions (mm)	180mm x 235mm
Weight (kg)	3,2 kg
Housing	Injected aluminium with oven painted coating and elongated watertight protective glass
Colour	Grey
Optical system	Elongated watertight protective glass – 110°
Lighting Distribution	Direct
Unified Glare Ratio	22
Colour temperature (K)	5700K
CRI (Ra)	>70
SCDM	3
Net lumen output (25°C)	4800lm
Efficacy – LOR (lm/W)	120lm/W
Power (driver incl.)	40 W
Driver	Included
IP	IP 66
IK	IK 08
Lifetime (hours)	100.000h L80 B10
Warranty	5 years
Origin	Spain
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC EN-60079-0:2012+A11:2013 EN-60079-1:2014 / EN-60079-28:2015 / EN-60079-31:2014
Marks	CE Ex

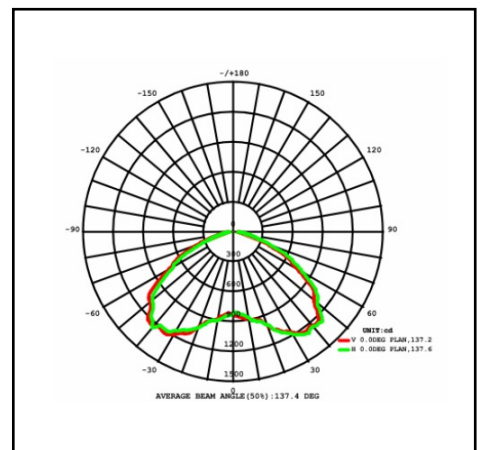

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10