



# Product data sheet


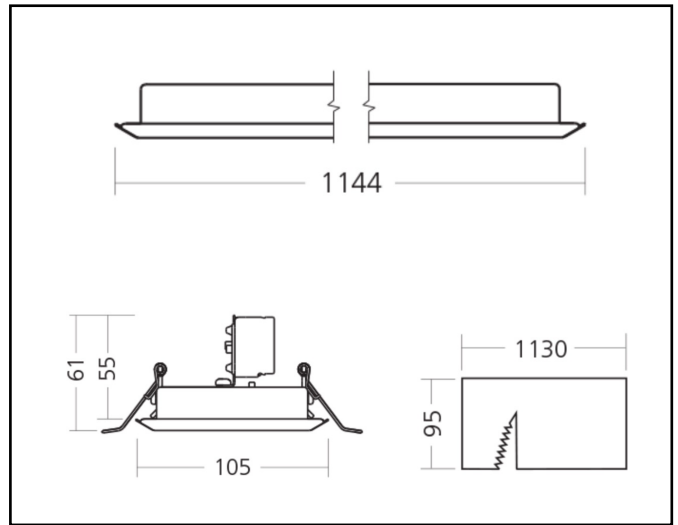


## Miline Duo Recessed M

33W 5250lm 830 LWL

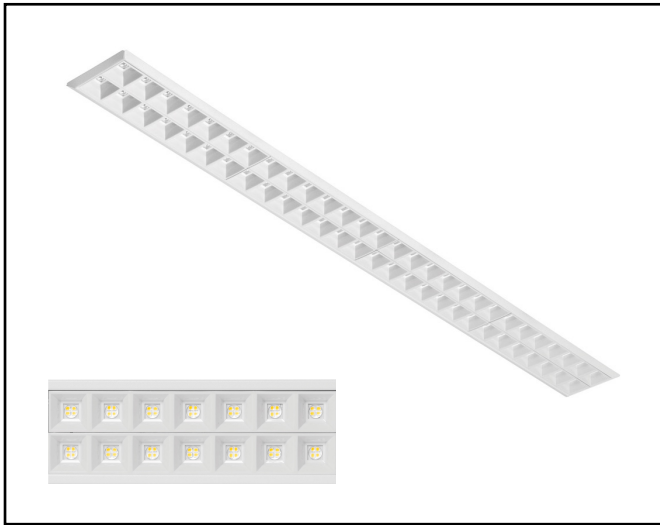


<b>Description</b>	Recessed lighting fixture
<b>Dimensions (mm)</b>	1144mm x 105mm x 61mm
<b>Weight (kg)</b>	2,000 kg
<b>Housing</b>	Steel sheet, painted
<b>Colour</b>	White (RAL 9003)
<b>Optical system</b>	Lenses 80° + white louvre
<b>Lighting Distribution</b>	Symmetric, 80°
<b>Unified Glare Ratio</b>	UGR 20
<b>Colour temperature (K)</b>	3000 K
<b>CRI (Ra)</b>	> 85
<b>SCDM</b>	3
<b>Net lumen output (25°C)</b>	5250 lm
<b>Efficacy – LOR (lm/W)</b>	159 lm/W
<b>Power (driver incl.)</b>	33 W
<b>Driver</b>	Driver incorporated DALI dimmable on request
<b>IP</b>	IP 20
<b>IK</b>	IK 02
<b>Lifetime (hours)</b>	100.000 hours L80 B10
<b>Warranty</b>	5 years
<b>Origin</b>	Slovakija
<b>Norms</b>	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

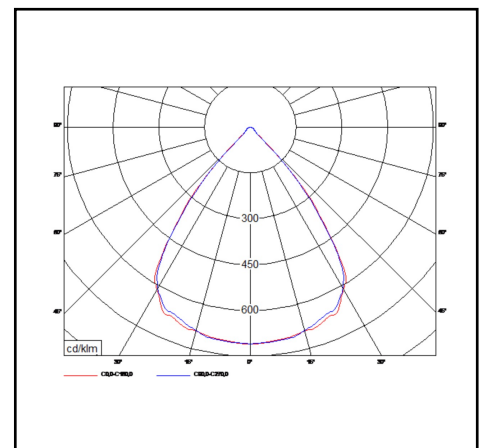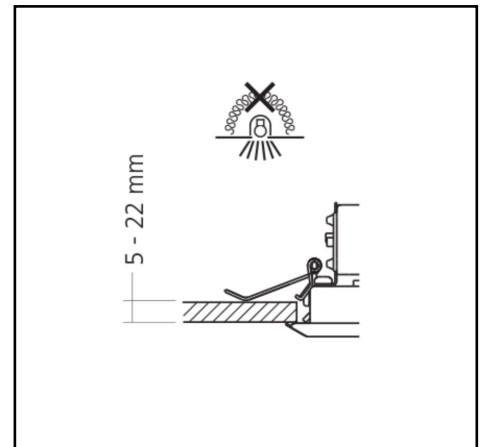

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering  
Ballingsweg 25 – 9620 Zottegem  
[info@euro-luce.be](mailto:info@euro-luce.be)  
[www.euro-luce.be](http://www.euro-luce.be)  
Tel 0032 54 55 71 10

Marks





# Product data sheet





## Miline Duo Recessed M

33W 5500lm 840 LWL

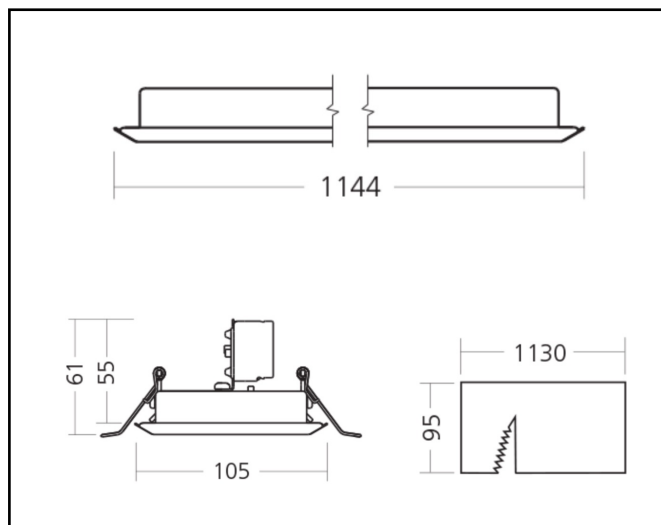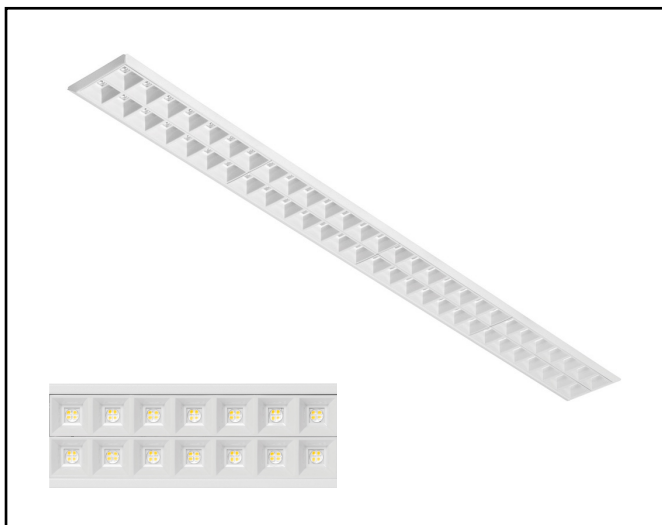

<b>Description</b>	Recessed lighting fixture
<b>Dimensions (mm)</b>	1144mm x 105mm x 61mm
<b>Weight (kg)</b>	2,000 kg
<b>Housing</b>	Steel sheet, painted
<b>Colour</b>	White (RAL 9003)
<b>Optical system</b>	Lenses 80° + white louvre
<b>Lighting Distribution</b>	Symmetric, 80°
<b>Unified Glare Ratio</b>	UGR 20
<b>Colour temperature (K)</b>	4000 K
<b>CRI (Ra)</b>	> 85
<b>SCDM</b>	3
<b>Net lumen output (25°C)</b>	5500 lm
<b>Efficacy – LOR (lm/W)</b>	167 lm/W
<b>Power (driver incl.)</b>	33 W
<b>Driver</b>	Driver incorporated DALI dimmable on request
<b>IP</b>	IP 20
<b>IK</b>	IK 02
<b>Lifetime (hours)</b>	100.000 hours L80 B10
<b>Warranty</b>	5 years
<b>Origin</b>	Slovakija
<b>Norms</b>	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

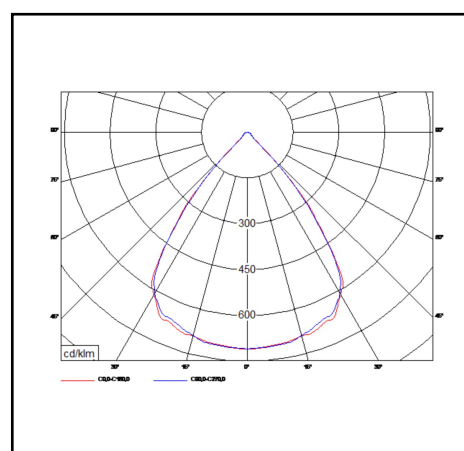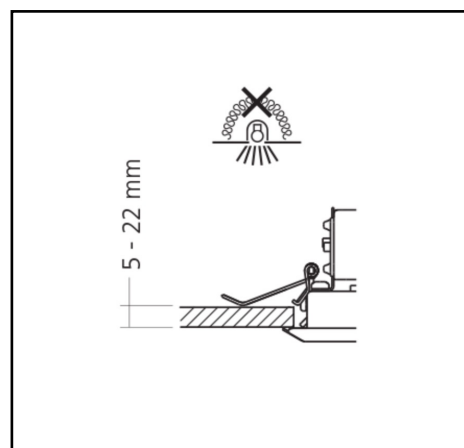

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering  
Ballingsweg 25 – 9620 Zottegem  
[info@euro-luce.be](mailto:info@euro-luce.be)  
[www.euro-luce.be](http://www.euro-luce.be)  
Tel 0032 54 55 71 10

Marks





# Product data sheet





## Miline Duo Recessed M

42W 6350lm 830 LWL

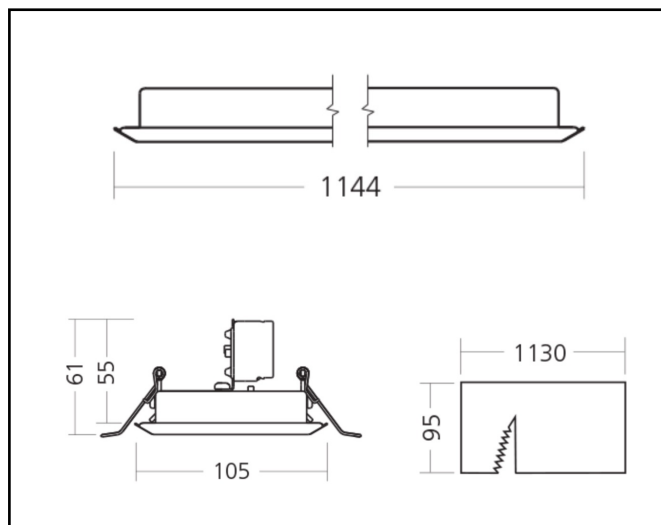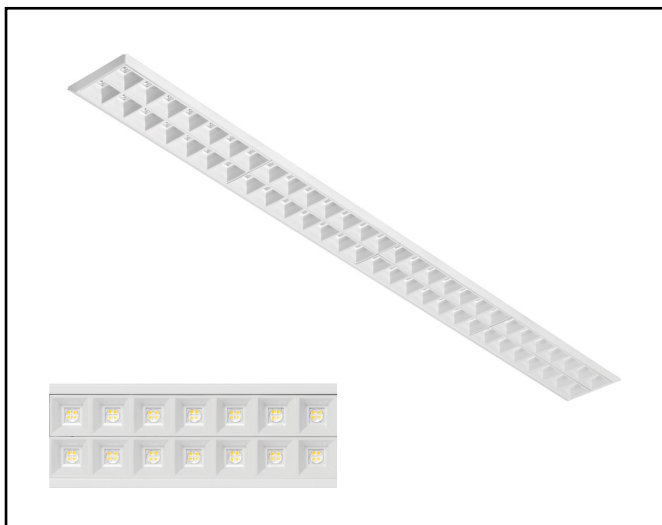

<b>Description</b>	Recessed lighting fixture
<b>Dimensions (mm)</b>	1144mm x 105mm x 61mm
<b>Weight (kg)</b>	2,000 kg
<b>Housing</b>	Steel sheet, painted
<b>Colour</b>	White (RAL 9003)
<b>Optical system</b>	Lenses 80° + white louvre
<b>Lighting Distribution</b>	Symmetric, 80°
<b>Unified Glare Ratio</b>	UGR 20
<b>Colour temperature (K)</b>	3000 K
<b>CRI (Ra)</b>	> 85
<b>SCDM</b>	3
<b>Net lumen output (25°C)</b>	6350 lm
<b>Efficacy – LOR (lm/W)</b>	151 lm/W
<b>Power (driver incl.)</b>	42 W
<b>Driver</b>	Driver incorporated DALI dimmable on request
<b>IP</b>	IP 20
<b>IK</b>	IK 02
<b>Lifetime (hours)</b>	100.000 hours L80 B10
<b>Warranty</b>	5 years
<b>Origin</b>	Slovakija
<b>Norms</b>	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

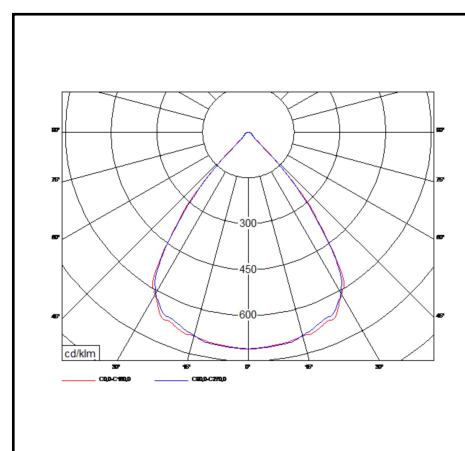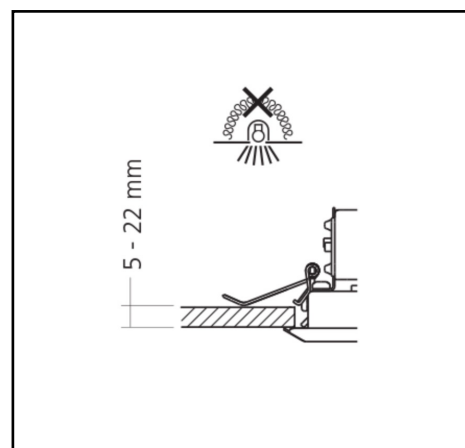

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering  
Ballingsweg 25 – 9620 Zottegem  
[info@euro-luce.be](mailto:info@euro-luce.be)  
[www.euro-luce.be](http://www.euro-luce.be)  
Tel 0032 54 55 71 10

Marks





# Product data sheet





## Miline Duo Recessed M

42W 6650lm 840 LWL

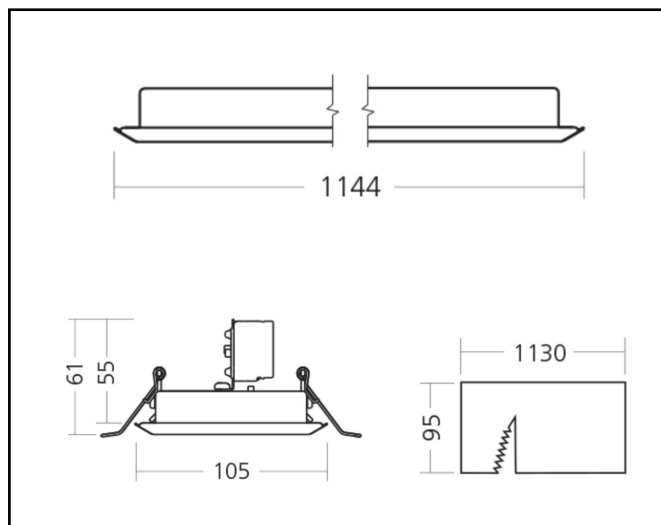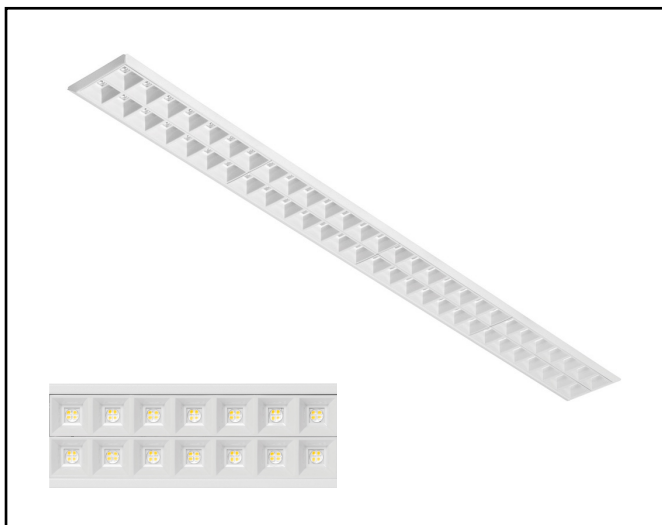


<b>Description</b>	Recessed lighting fixture
<b>Dimensions (mm)</b>	1144mm x 105mm x 61mm
<b>Weight (kg)</b>	2,000 kg
<b>Housing</b>	Steel sheet, painted
<b>Colour</b>	White (RAL 9003)
<b>Optical system</b>	Lenses 80° + white louvre
<b>Lighting Distribution</b>	Symmetric, 80°
<b>Unified Glare Ratio</b>	UGR 20
<b>Colour temperature (K)</b>	4000 K
<b>CRI (Ra)</b>	> 85
<b>SCDM</b>	3
<b>Net lumen output (25°C)</b>	6650 lm
<b>Efficacy – LOR (lm/W)</b>	158 lm/W
<b>Power (driver incl.)</b>	42 W
<b>Driver</b>	Driver incorporated DALI dimmable on request
<b>IP</b>	IP 20
<b>IK</b>	IK 02
<b>Lifetime (hours)</b>	100.000 hours L80 B10
<b>Warranty</b>	5 years
<b>Origin</b>	Slovakija
<b>Norms</b>	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

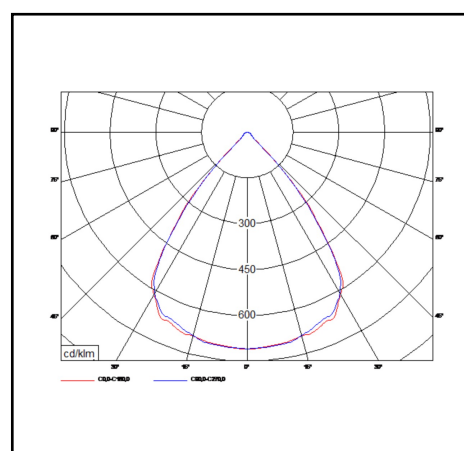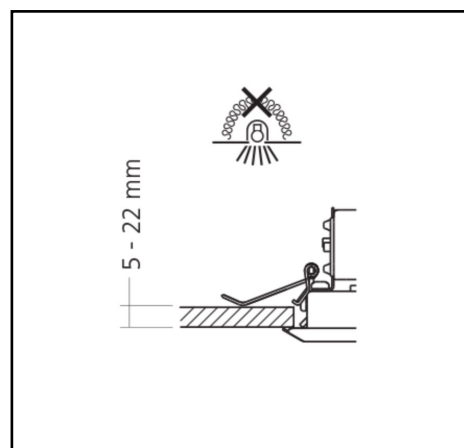

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering  
Ballingsweg 25 – 9620 Zottegem  
[info@euro-luce.be](mailto:info@euro-luce.be)  
[www.euro-luce.be](http://www.euro-luce.be)  
Tel 0032 54 55 71 10

Marks





# Product data sheet





## Miline Duo Recessed L

41W 6550lm 830 LWL

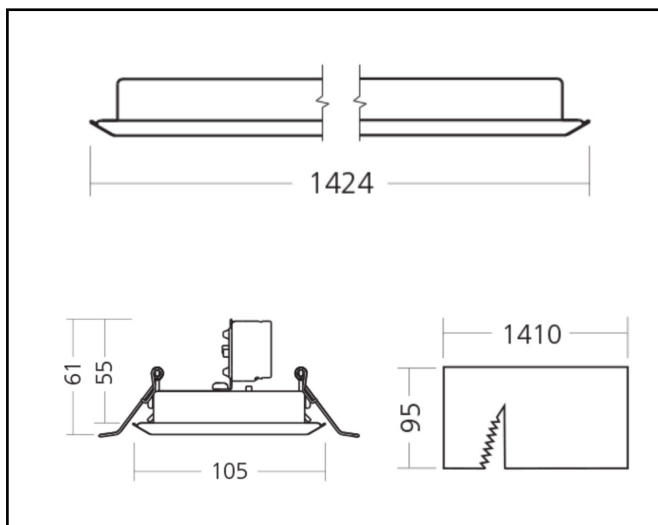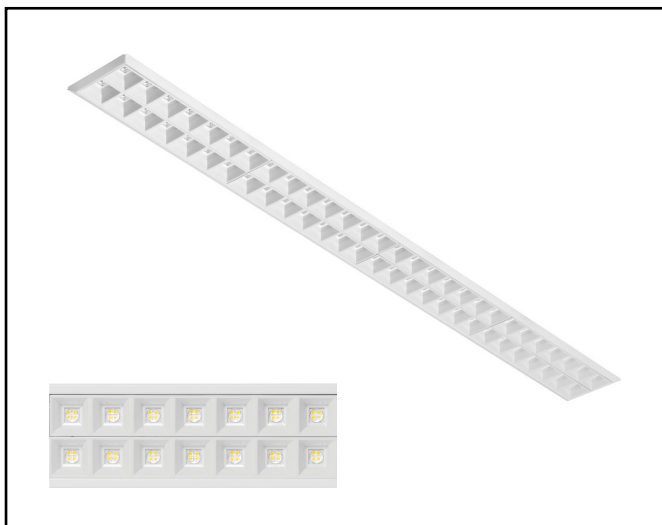


<b>Description</b>	Recessed lighting fixture
<b>Dimensions (mm)</b>	1424mm x 105mm x 61mm
<b>Weight (kg)</b>	2,500 kg
<b>Housing</b>	Steel sheet, painted
<b>Colour</b>	White (RAL 9003)
<b>Optical system</b>	Lenses 80° + white louvre
<b>Lighting Distribution</b>	Symmetric, 80°
<b>Unified Glare Ratio</b>	UGR 20
<b>Colour temperature (K)</b>	3000 K
<b>CRI (Ra)</b>	> 85
<b>SCDM</b>	3
<b>Net lumen output (25°C)</b>	6550 lm
<b>Efficacy – LOR (lm/W)</b>	152 lm/W
<b>Power (driver incl.)</b>	41 W
<b>Driver</b>	Driver incorporated DALI dimmable on request
<b>IP</b>	IP 20
<b>IK</b>	IK 02
<b>Lifetime (hours)</b>	100.000 hours L80 B10
<b>Warranty</b>	5 years
<b>Origin</b>	Slovakija
<b>Norms</b>	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

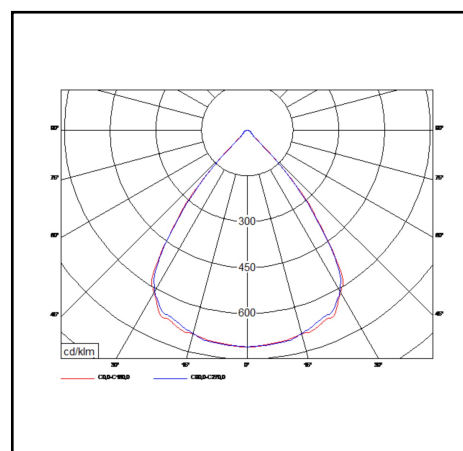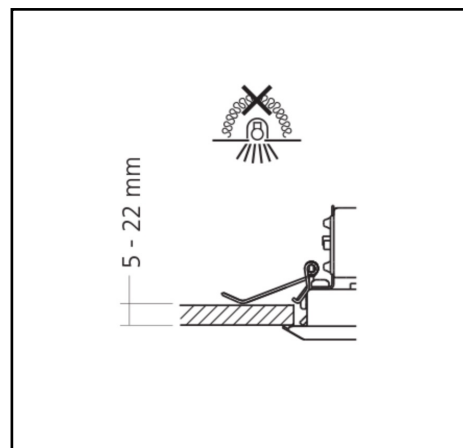

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering  
Ballingsweg 25 – 9620 Zottegem  
[info@euro-luce.be](mailto:info@euro-luce.be)  
[www.euro-luce.be](http://www.euro-luce.be)  
Tel 0032 54 55 71 10

Marks





# Product data sheet





## Miline Duo Recessed L

41W 6850lm 840 LWL

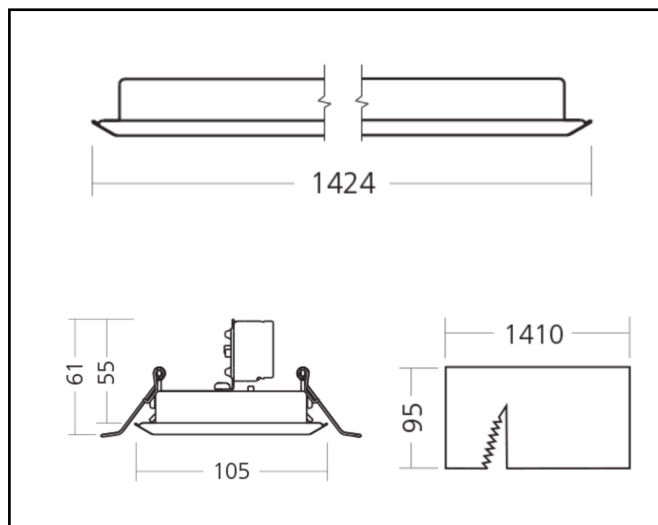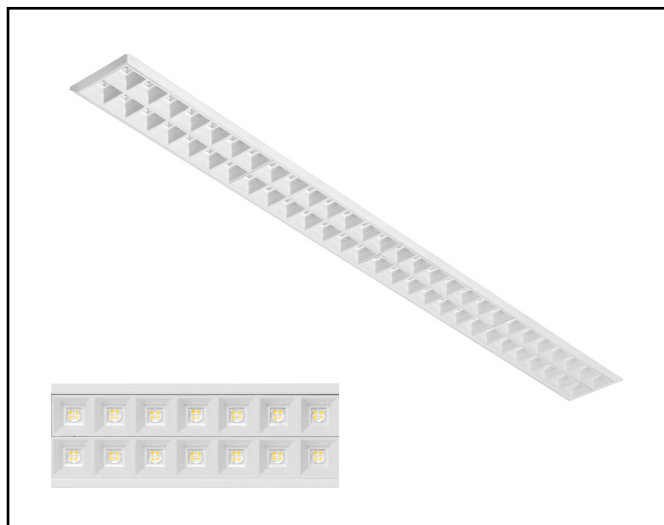


<b>Description</b>	Recessed lighting fixture
<b>Dimensions (mm)</b>	1424mm x 105mm x 61mm
<b>Weight (kg)</b>	2,500 kg
<b>Housing</b>	Steel sheet, painted
<b>Colour</b>	White (RAL 9003)
<b>Optical system</b>	Lenses 80° + white louvre
<b>Lighting Distribution</b>	Symmetric, 80°
<b>Unified Glare Ratio</b>	UGR 20
<b>Colour temperature (K)</b>	4000 K
<b>CRI (Ra)</b>	> 85
<b>SCDM</b>	3
<b>Net lumen output (25°C)</b>	6850 lm
<b>Efficacy – LOR (lm/W)</b>	167 lm/W
<b>Power (driver incl.)</b>	41 W
<b>Driver</b>	Driver incorporated DALI dimmable on request
<b>IP</b>	IP 20
<b>IK</b>	IK 02
<b>Lifetime (hours)</b>	100.000 hours L80 B10
<b>Warranty</b>	5 years
<b>Origin</b>	Slovakija
<b>Norms</b>	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

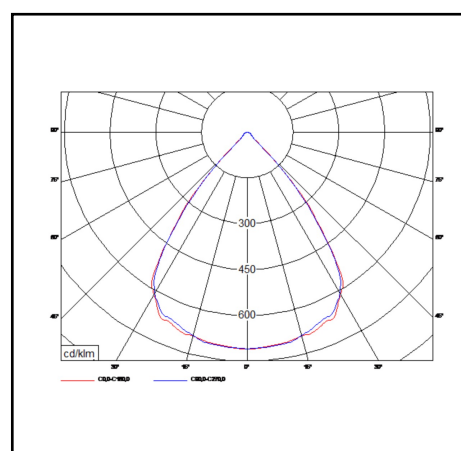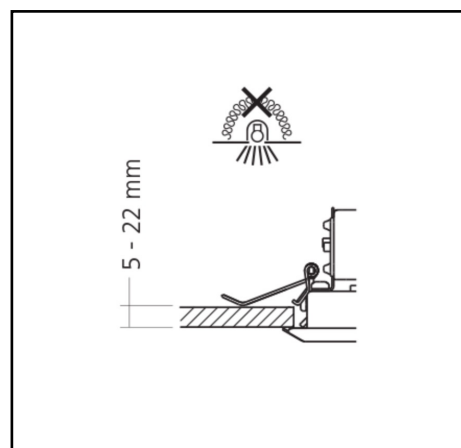

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering  
Ballingsweg 25 – 9620 Zottegem  
[info@euro-luce.be](mailto:info@euro-luce.be)  
[www.euro-luce.be](http://www.euro-luce.be)  
Tel 0032 54 55 71 10

Marks





# Product data sheet





## Miline Duo Recessed L

52W 7950lm 830 LWL

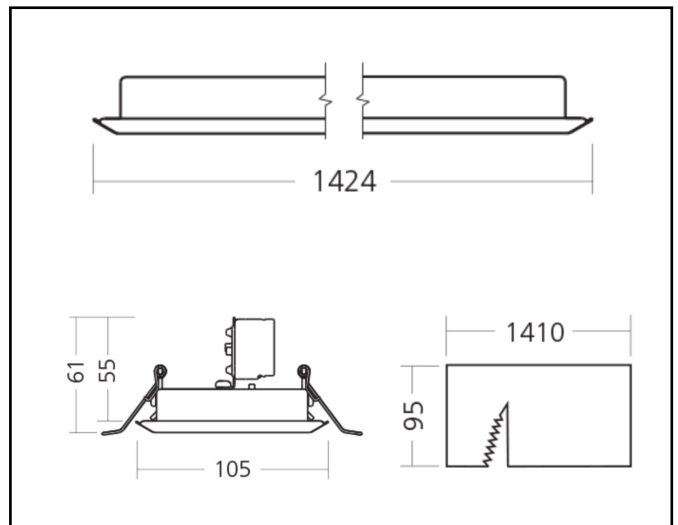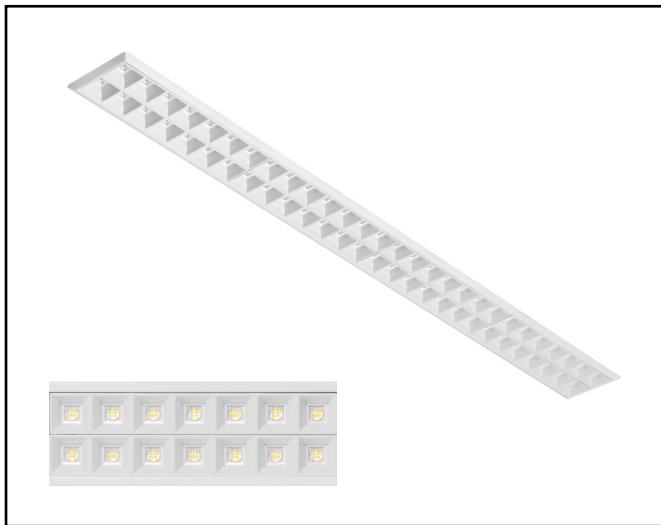

<b>Description</b>	Recessed lighting fixture
<b>Dimensions (mm)</b>	1424mm x 105mm x 61mm
<b>Weight (kg)</b>	2,500 kg
<b>Housing</b>	Steel sheet, painted
<b>Colour</b>	White (RAL 9003)
<b>Optical system</b>	Lenses 80° + white louvre
<b>Lighting Distribution</b>	Symmetric, 80°
<b>Unified Glare Ratio</b>	UGR 20
<b>Colour temperature (K)</b>	3000 K
<b>CRI (Ra)</b>	> 85
<b>SCDM</b>	3
<b>Net lumen output (25°C)</b>	7950 lm
<b>Efficacy – LOR (lm/W)</b>	153 lm/W
<b>Power (driver incl.)</b>	52 W
<b>Driver</b>	Driver incorporated DALI dimmable on request
<b>IP</b>	IP 20
<b>IK</b>	IK 02
<b>Lifetime (hours)</b>	100.000 hours L80 B10
<b>Warranty</b>	5 years
<b>Origin</b>	Slovakija
<b>Norms</b>	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

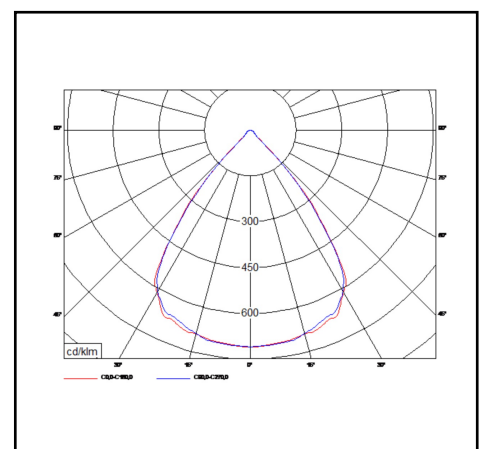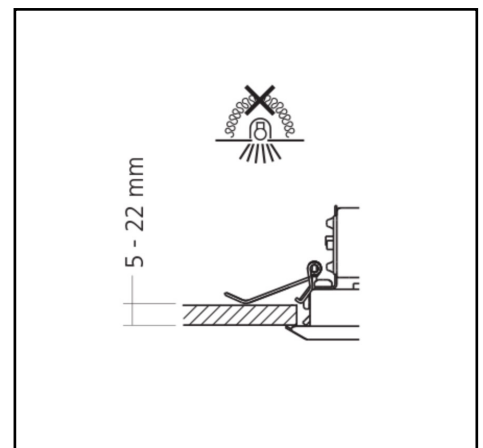

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering  
Ballingsweg 25 – 9620 Zottegem  
[info@euro-luce.be](mailto:info@euro-luce.be)  
[www.euro-luce.be](http://www.euro-luce.be)  
Tel 0032 54 55 71 10





# Product data sheet





## Miline Duo Recessed L

52W 8300lm 840 LWL

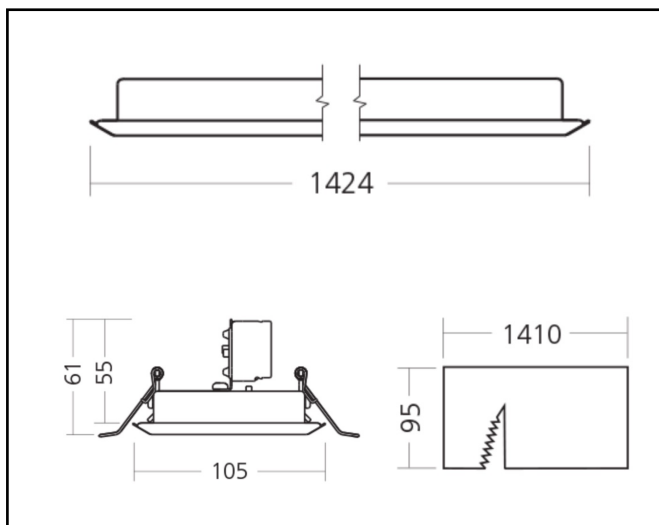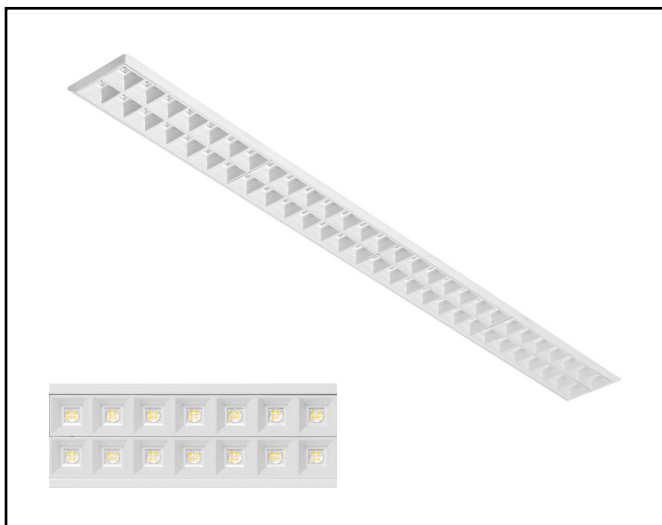

<b>Description</b>	Recessed lighting fixture
<b>Dimensions (mm)</b>	1424mm x 105mm x 61mm
<b>Weight (kg)</b>	2,500 kg
<b>Housing</b>	Steel sheet, painted
<b>Colour</b>	White (RAL 9003)
<b>Optical system</b>	Lenses 80° + white louvre
<b>Lighting Distribution</b>	Symmetric, 80°
<b>Unified Glare Ratio</b>	UGR 20
<b>Colour temperature (K)</b>	4000 K
<b>CRI (Ra)</b>	> 85
<b>SCDM</b>	3
<b>Net lumen output (25°C)</b>	8300 lm
<b>Efficacy – LOR (lm/W)</b>	160 lm/W
<b>Power (driver incl.)</b>	52 W
<b>Driver</b>	Driver incorporated DALI dimmable on request
<b>IP</b>	IP 20
<b>IK</b>	IK 02
<b>Lifetime (hours)</b>	100.000 hours L80 B10
<b>Warranty</b>	5 years
<b>Origin</b>	Slovakija
<b>Norms</b>	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

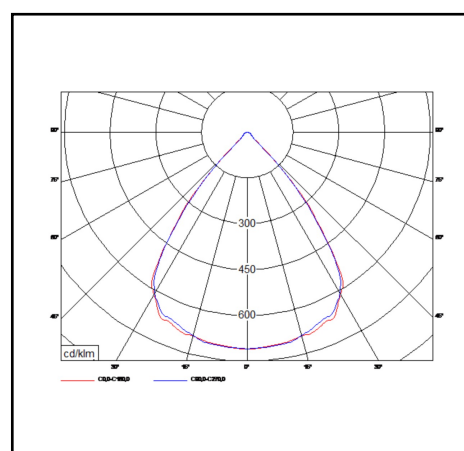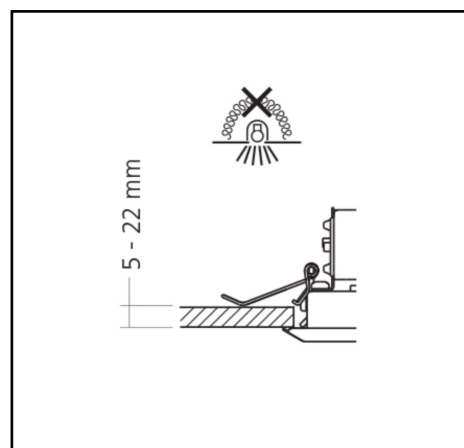

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering  
Ballingsweg 25 – 9620 Zottegem  
[info@euro-luce.be](mailto:info@euro-luce.be)  
[www.euro-luce.be](http://www.euro-luce.be)  
Tel 0032 54 55 71 10

Marks

