


Product data sheet




BOGOTA DOWNLIGHT

GU10 downlighter

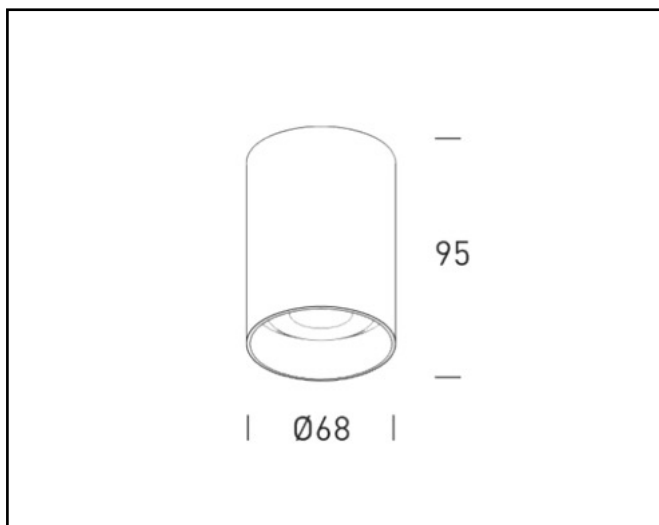


Description	GU10 Downlighter
Dimensions (mm)	95mm x 68mm
Weight (kg)	0,280 kg
Housing	Aluminium, painted
Colour	Black(B) or white(W)
Optical system	Bulb
Lighting Distribution	Bulb
Unified Glare Ratio	Bulb
Colour temperature (K)	Bulb
CRI (Ra)	Bulb
SCDM	Bulb
Net lumen output (25°C)	Bulb
Efficacy – LOR (lm/W)	Bulb
Power (driver incl.)	Bulb
Driver	Bulb
IP	IP 20
IK	IK 02
Lifetime (hours)	Bulb
Warranty	3 years
Origin	Spain
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10


Marks  

Product data sheet



BRUSSELS 26

26W 2630lm-2760lm 3000-3500-4000K 90° DALI dimmable

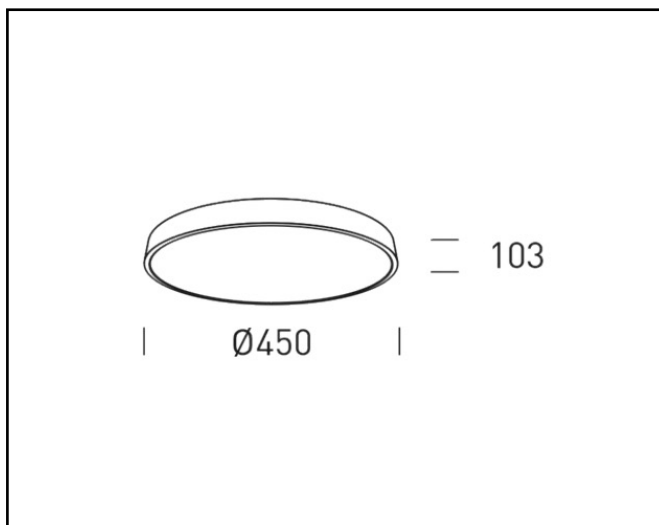

Description	Surface mounted luminaire
Dimensions (mm)	450mm x 103mm
Weight (kg)	4,500 kg
Housing	Aluminium, painted
Colour	Black(B) or white(W)
Optical system	Prismatic PMMA diffuser, 90°
Lighting Distribution	90°
Unified Glare Ratio	UGR <19
Colour temperature (K)	3000 or 3500 or 4000K
CRI (Ra)	> 83
SCDM	3
Net lumen output (25°C)	2630lm – 2760lm
Efficacy – LOR (lm/W)	101lm/W – 106lm/W
Power (driver incl.)	26W, flicker free
Driver	Driver incorporated, 0-10V, DALI or Push dimmable
IP	IP 20
IK	IK 02
Lifetime (hours)	50.000 hours L80 B10
Warranty	5 years
Origin	Spain
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10


Marks

Product data sheet





BRUSSELS 40

40W 4120lm-4340lm 3000-3500-4000K 90° DALI dimmable

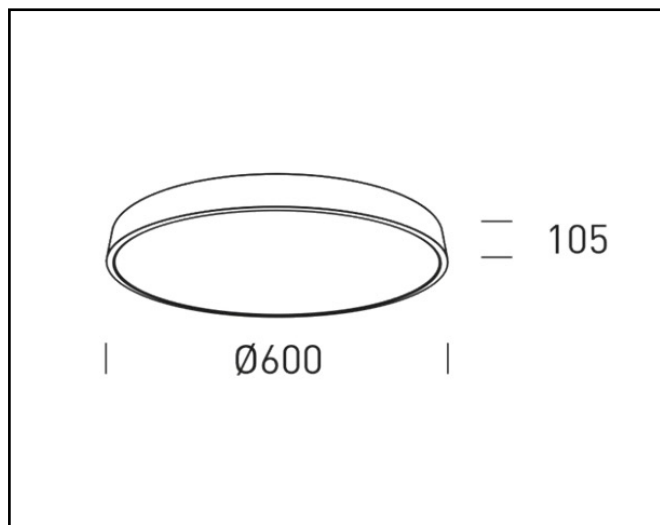

Description	Surface mounted luminaire
Dimensions (mm)	600mm – 105mm
Weight (kg)	6,500 kg
Housing	Aluminium, painted
Colour	Black(B) or white(W)
Optical system	Prismatic PMMA diffuser, 90°
Lighting Distribution	90°
Unified Glare Ratio	UGR <19
Colour temperature (K)	3000 or 3500 or 4000K
CRI (Ra)	> 83
SCDM	3
Net lumen output (25°C)	4120lm – 4340lm
Efficacy – LOR (lm/W)	103lm/W – 108lm/W
Power (driver incl.)	40W, flicker free
Driver	Driver incorporated, 0-10V, DALI or Push dimmable
IP	IP 20
IK	IK 02
Lifetime (hours)	50.000 hours L80 B10
Warranty	5 years
Origin	Spain
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet



BOGOTA SURFACE SPOT

GU10 bulb 3f track spot

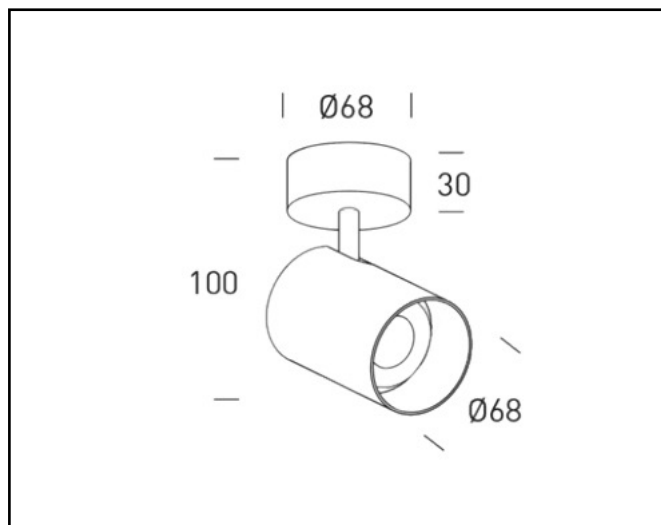

Description GU10 bulb 3f track spot

Dimensions (mm) 68mm x 100mm

Weight (kg) 0,440 kg

Housing Aluminium, painted

Colour Black(B) or white(W)

Optical system Bulb

Lighting Distribution Bulb

Unified Glare Ratio Bulb

Colour temperature (K) Bulb

CRI (Ra) Bulb

SCDM Bulb

Net lumen output (25°C) Bulb

Efficacy – LOR (lm/W) Bulb

Power (driver incl.) Bulb, max 50W

Driver Bulb

IP IP 20

IK IK 02


Lifetime (hours) Bulb

Warranty 3 years

Origin Spain

Norms LVD 2006/95/EC
EMC 2004/108/EC
RoHS 2001/65/EC

Marks  



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10