
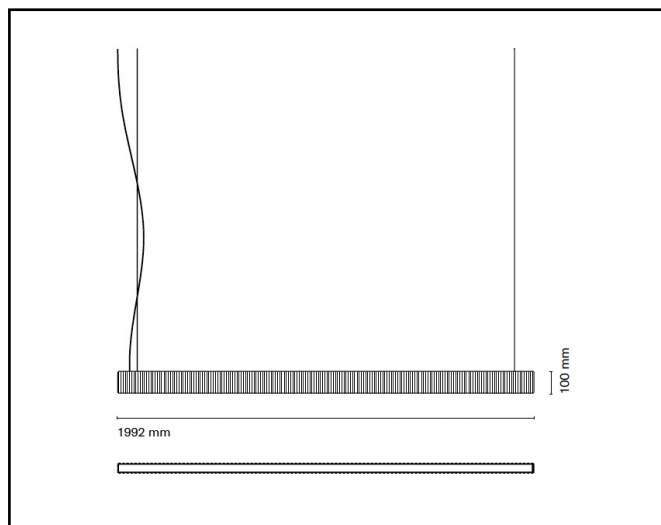




Product data sheet

DUNE 2000

45,5W 5394lm 3000K Cement Grey

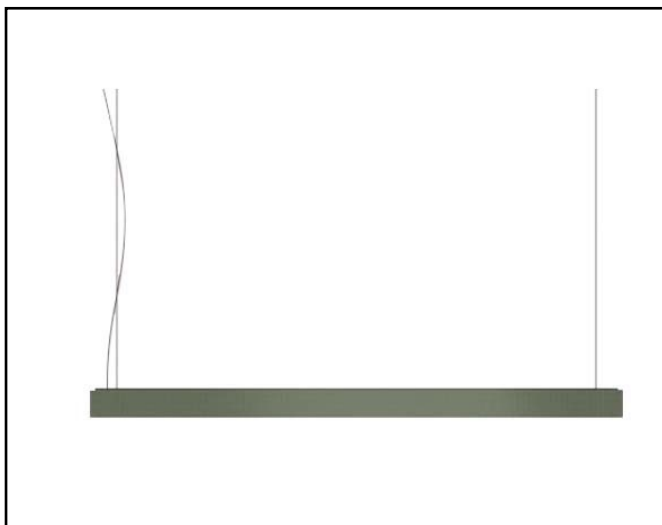

Description	General linear lighting, suspended
Dimensions (mm)	1992mm x 80mm x 50mm
Weight (kg)	3,600 kg
Housing	Extruded aluminium
Colour	Cement Grey (RAL 7033)
Optical system	Opal cover
Lighting Distribution	110°
Unified Glare Ratio	<22
Colour temperature (K)	3000K
CRI (Ra)	90
SCDM	3
Net lumen output (25°C)	5394lm
Efficacy – LOR (lm/W)	118 lm/W
Power (driver incl.)	45,5W
Driver	Built-in
IP	20
IK	IK 02
Lifetime (hours)	50.000h L80 B20
Warranty	5 years
Origin	Spain
Norms	



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks