


Product data sheet




BRUSSELS 26

26W 2630lm-2760lm 3000-3500-4000K 90° DALI dimmable

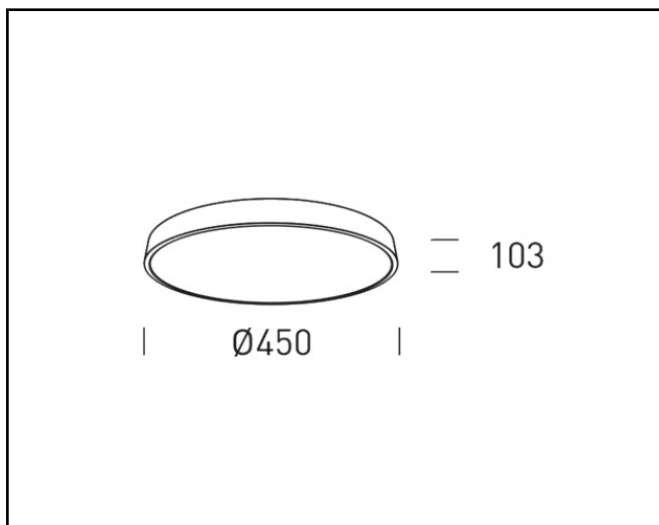

Description	Surface mounted luminaire
Dimensions (mm)	450mm x 103mm
Weight (kg)	4,500 kg
Housing	Aluminium, painted
Colour	Black(B) or white(W)
Optical system	Prismatic PMMA diffuser, 90°
Lighting Distribution	90°
Unified Glare Ratio	UGR <19
Colour temperature (K)	3000 or 3500 or 4000K
CRI (Ra)	> 83
SCDM	3
Net lumen output (25°C)	2630lm – 2760lm
Efficacy – LOR (lm/W)	101lm/W – 106lm/W
Power (driver incl.)	26W, flicker free
Driver	Driver incorporated, 0-10V, DALI or Push dimmable
IP	IP 20
IK	IK 02
Lifetime (hours)	50.000 hours L80 B10
Warranty	5 years
Origin	Spain
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks

