




Product data sheet

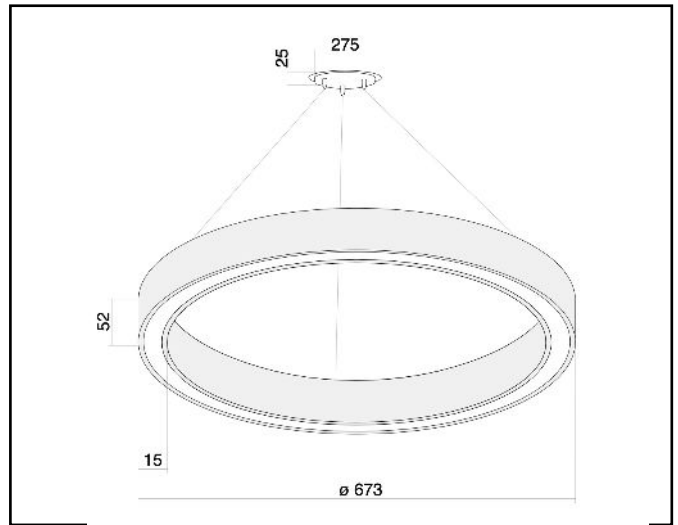

Slender CC

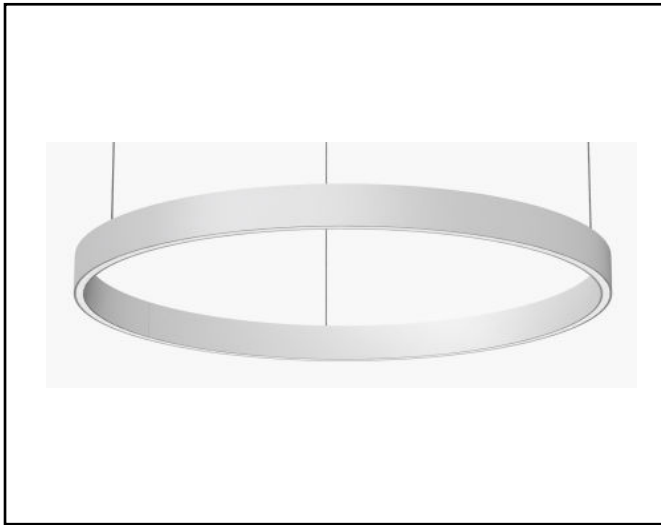

Description	Suspended luminaire
Dimensions (mm)	700-900-1200-1500 x 15mm H52mm
Weight (kg)	
Housing	Aluminium
Colour	Grey + (24 RAL colours)
Optical system	Opal
Lighting Distribution	Direct
Unified Glare Ratio	
Colour temperature (K)	3000K – 4000K
CRI (Ra)	>80
SCDM	3
Net lumen output (25°C)	4000lm –12 500lm
Efficacy – LOR (lm/W)	129lm/W
Power (driver incl.)	35W – 70W – 105W
Driver	Driver incl. Dali available
IP	IP 40
IK	IK 02
Lifetime (hours)	60,000 h L80B10
Warranty	3 years
Origin	Spain
Norms	



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
 Ballingsweg 25
 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
 Tel 0032 54 55 71 10

Marks