



Product data sheet

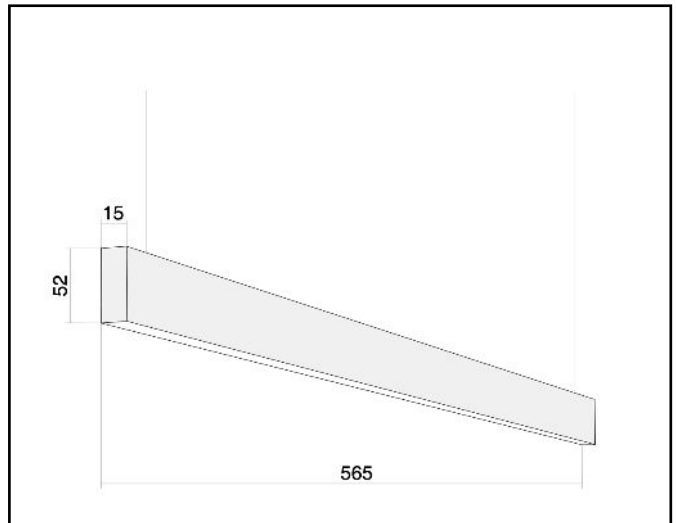

Slender S

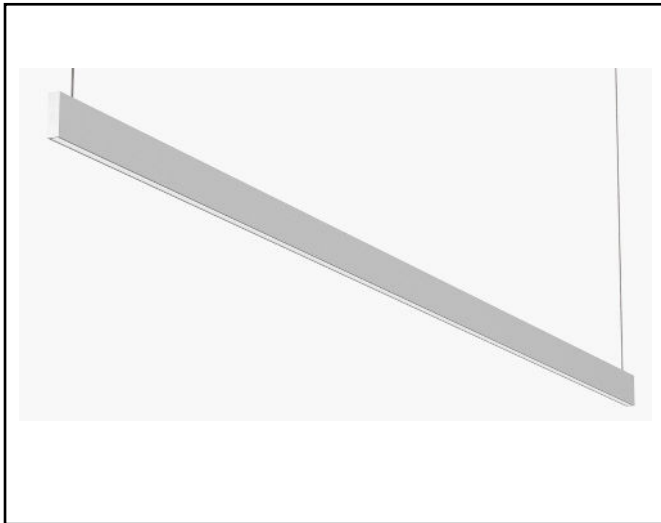

Description	Suspended luminaire
Dimensions (mm)	600-900-1200-1500-1800 x 15mm H52mm
Weight (kg)	
Housing	Aluminium
Colour	Grey + (24 RAL colours)
Optical system	Opal
Lighting Distribution	Direct
Unified Glare Ratio	
Colour temperature (K)	3000K – 4000K
CRI (Ra)	>80
SCDM	3
Net lumen output (25°C)	1000lm – 3300lm
Efficacy – LOR (lm/W)	60lm/W
Power (driver incl.)	20W – 25W – 35W – 40W – 50W
Driver	Driver incl. Dali available
IP	IP 40
IK	IK 02
Lifetime (hours)	60,000 h L80B10
Warranty	3 years
Origin	Spain
Norms	



All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
 Ballingsweg 25
 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
 Tel 0032 54 55 71 10

Marks