

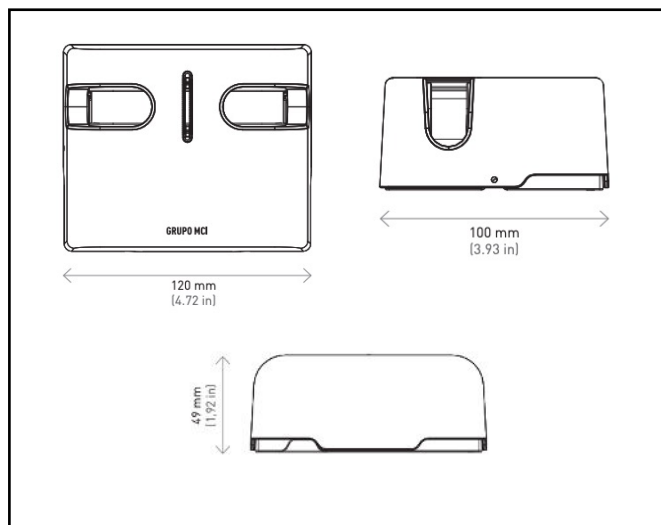


Product data sheet

BOW



Description	Architectural accent lighting
Dimensions (mm)	100mmx120mmx49mm
Weight (kg)	400g
Housing	Aluminium body
Colour	Grey, Black, White, Corten, Stone
Optical system	Security glass cover
Lighting Distribution	180° x15°
Unified Glare Ratio	<19
Colour temperature (K)	1800K - 2700K – 3000K– 4000K – RGBW
CRI (Ra)	80
SCDM	3
Net lumen output (25°C)	6W: 153lm – 174lm 10W: 281lm – 320lm
Efficacy – LOR (lm/W)	25,5lm/W – 32lm/W
Power (driver incl.)	6W – 10W
Driver	ON/OFF, DMX/RDM, DALI
IP	IP 65
IK	IK 08
Lifetime (hours)	70.000 hours L80 B10
Warranty	5 years
Origin	Spain
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008
Marks	

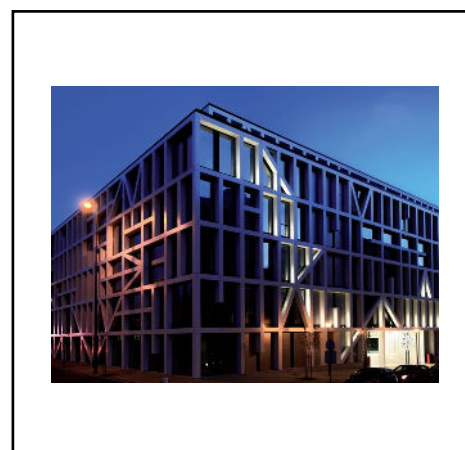

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
 Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
 Tel 0032 54 55 71 10